




ALUMINIUM ENTRANCE DOORS

NEW. Exquisite design options with black glass for door glazing and side elements

HÖRMANN



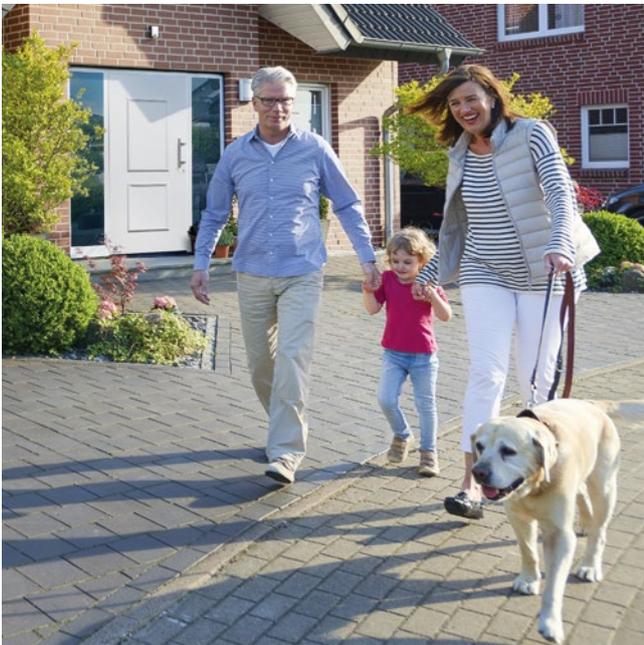

04

Good reasons
to try Hörmann



14

Door styles
Inspirations



74

Design
Equipment
Accessories

Responsibility for generations

The Hörmann family business has over 85 years of experience as a construction component specialist. This gives us an obligation to both current and future generations. That's why environmental responsibility plays such an important role for us. With this in mind, we develop innovative solutions for sustainable products and intelligent environmental protection.



“A GOOD REPUTATION MUST BE EARNED.”

August Hörmann

In keeping with the tradition started by the company's founder, the Hörmann brand is a true promise of quality and, with sales of over 20 million doors and operators, is one of Europe's most successful suppliers. Due to the comprehensive international sales and service network, Hörmann is your strong partner for high-quality construction components.



WE THINK AND ACT GREEN. As a family business, we are very conscious of our responsibility to future generations and offer all products for residential construction CO₂-neutral as standard. The Hörmann sustainability strategy aims to reduce and avoid emissions. We cover 100% of our electrical power needs at all European production sites* with genuine green electricity from renewable sources. We also apply many other measures to reduce our consumption and save more than 75000 tonnes of CO₂ each year. We work with ClimatePartner to offset the remaining emissions by supporting certified climate protection projects.

* Except in France



You can find further information at
www.hoermann.com/sustainability



ClimatePartner
certified product
climate-id.com/XNEBKC



CO₂
measure
reduce
contribute

Brand quality made in Germany



The family-owned company Hörmann offers all important construction components for building and renovating projects from a single source. We manufacture in highly specialised factories using state-of-the-art production technologies. Our employees work intensively on new products, continual further developments and improvements to details. The results are patents and unique products on the market.





10-year warranty

LONG-LASTING. GUARANTEED. All doors are developed and manufactured by Hörmann. Endurance tests under real conditions ensure mature series products with Hörmann quality. Thanks to this and uncompromising quality assurance, you receive a 10-year* warranty on all Hörmann aluminium entrance doors.

* The complete warranty conditions can be found at: www.hoermann.com



Easy to fit

FAST AND CLEAN FITTING. Our elegant, robust aluminium entrance doors with RC3 security features are fitted professionally using pre-drilled fitting points, just like standard entrance doors from other manufacturers without RC equipment. Additional or special fixing material is not necessary, despite the certified high security features. Besides transport protection, the threshold with protective tube also provides a reliable floor recess. Thanks to prepared cables, electrical components are easily connected via plug-in connections.

FITTING GROOVE FOR INVISIBLE SCREW FITTING. Our single-leaf entrance doors without side elements are now equipped with a fitting groove as standard for concealed fitting without any visible screw heads. A high-quality cover strip conceals the groove, creating a beautiful, homogeneous profile view in the rebate area.



The fitting groove ensures concealed fitting without any visible screw heads. Additional fastening options also make the doors easier to fit.

PAGE 2 / 3. Aluminium entrance door ThermoSafe style 860, stainless steel handle HOE 610, Anthracite grey RAL 7016 matt fine structure, optional side element

Door design for the highest requirements

Greet your guests with a Hörmann aluminium entrance door! And of course, you and your family can also delight in the sophisticated design of our doors day after day. Our doors are a true eye-catcher on the outside, and inside they harmonise perfectly with your residential internal doors. Simply beautiful!





DOOR LEAF WITHOUT VISIBLE LEAF PROFILE.

Our ThermoSafe, ThermoSafe Hybrid, ThermoPlan Hybrid and ThermoCarbon entrance doors give you an exquisite and elegant reception. The shapely door leaf with its solid interior and exterior and leaf profile on the inside fulfils the highest design requirements. The interior view harmonises perfectly with your residential internal doors.

TOP. Exterior and interior view of ThermoSafe entrance doors without visible leaf profile

BOTTOM. Exterior and interior view of entrance doors from other manufacturers with visible leaf profile

PAGE 8. Aluminium entrance door ThermoSafe style 860, stainless steel handle HOE 710, door height 2500 mm, Anthracite grey RAL 7016 matt fine structure, optional side elements

We protect you from unwanted visitors

An apartment is broken into every five minutes, making it even more important to equip your entrance door with a high security standard. If a burglar is not successful within approx. 90 seconds, they generally give up their break-in attempt. For this reason, nearly half of all break-in attempts fail if the entrance door is break-in-resistant.





Only from Hörmann



RC3 security
As standard*



Tested and certified

SECURITY FEATURES AS STANDARD. Our entrance doors make it especially difficult for burglars to break into your home. This protects your home from break-in attempts. Without further optional extras, our entrance doors* achieve the highest possible classification of the security label (without burglar alarm system). Additionally, the certified security features are not visible on the door, unlike with many competitor solutions.

→ Further information can be found starting on page 82.

Only from Hörmann



10-year security promise

10-YEAR SECURITY PROMISE. In the unlikely event of a break-in through one of our aluminium entrance doors with RC3 or RC4 security features, you will receive **a new Hörmann entrance door with the same features, including professional fitting by a Hörmann sales partner, or €3000 cash (for example if the damage is covered by your household insurance).**



Further information and a video on the topic can be found at www.hoermann.de/sicherheitsversprechen

Choose the entrance door that matches your lifestyle

This is where individuality comes into play: No matter what your priorities are when it comes to your entrance door, at Hörmann you will find an entrance door tailored to your needs – from elegant door views to extensive glazings all the way through to intelligent operation. Be inspired by the Hörmann variety on the following pages or configure your dream door conveniently online.





Acoustic insulation
Up to 39 dB



Excellent thermal insulation



ThermoCarbon with a U_0 -value of up to $0.47 \text{ W}/(\text{m}^2\cdot\text{K})$

CONVINCING IN EVERY VERSION. Our aluminium entrance doors are superior to plastic or timber doors in many ways. Thanks to perfectly matched high-quality materials, we set benchmarks in terms of stability, acoustic insulation and thermal insulation. In addition, all of our aluminium entrance doors meet the requirements of the German Buildings Energy Act (Gebäudeenergiegesetz, GEG). ThermoCarbon entrance doors are also certified for low-energy houses by ift Rosenheim.

→ Further information can be found starting on page 78.

THE DOOR OF YOUR CHOICE IN JUST A FEW CLICKS.

With the door configurator, you can conveniently test many design and product variations on your own PC or tablet in advance. You can put your dream entrance door together in just a few clicks by selecting the door version, style, colour and size and also see the recommended retail price of your configuration. If you then upload a picture of your house and place the door in your entrance, you can see in advance how well your new entrance door will match your home.



The Hörmann configurator can be found at:
www.hormann.co.uk/home-owners-and-renovators/configurator





16

Design overview

Advantages

22

ThermoSafe / ThermoSafe Hybrid

- ✓ Very good thermal insulation
- ✓ Flush-fitting interior
- ✓ Exterior optionally made of stainless steel with high-quality powder coating (ThermoSafe Hybrid)

44

ThermoPlan Hybrid

- ✓ Very good thermal insulation and improved acoustic insulation
- ✓ Flush-fitting interior and exterior
- ✓ Door leaf exterior made of stainless steel with high-quality powder coating

50

ThermoCarbon

- ✓ Excellent thermal insulation
- ✓ Interior with thick rebate
- ✓ Up to 3000 mm door height

56

TopComfort

- ✓ Good thermal insulation
- ✓ Large-surface glazing in the leaf

60

NEW. TopComfort Portal

- ✓ Double-leaf entrance door with flush-fitting transition between the traffic leaf and the fixed leaf
- ✓ Flush-fitting interior and exterior
- ✓ Good thermal insulation

66

Individualisation

- ✓ Colour combinations and glass variants
- ✓ Matching residential internal doors and garage doors
- ✓ Control elements and letter box systems

THERMOSAFE / THERMOSAFE HYBRID



Style 40
Page 39



Style 45
Page 39



Style 65
Page 33



Style 75
Page 33



Style 110
Page 34



Style 136
Page 34



Style 138
Page 34



Style 140
Page 34



Style 407
Page 43



Style 413
Page 41



Style 414
Page 41



Style 416
Page 41



Style 419
Page 43



Style 420
Page 43



Style 421
Page 43



Style 422*
Page 43



Style 459*
Page 43



Style 501
Page 36



Style 502
Page 36



Style 503
Page 35



Style 504
Page 33



Style 505
Page 39



Style 514
Page 36



Style 524
Page 36



Style 650
Page 33



Style 675
Page 41



Style 680
Page 33



Style 686
Page 35



Style 689
Page 33



Style 693
Page 30



Style 694
Page 41



Style 697
Page 33



Style 832
Page 26



Style 836
Page 27



Style 860
Page 24



Style 861
Page 30



Style 862
Page 30



Style 867
Page 33



Style 871
Page 31



Style 872
Page 31

→ Further information can be found starting on page 22.



Style 166
Page 34



Style 173
Page 31



Style 176
Page 36



Style 177
Page 36



Style 185
Page 35



Style 188
Page 30



Style 189
Page 35



Style 402
Page 41



Style 445
Page 41



Style 451
Page 42



Style 452
Page 42



Style 453
Page 42



Style 454*
Page 43



Style 455
Page 42



Style 456
Page 42



Style 457
Page 42



Style 551
Page 25



Style 552
Page 39



Style 553*
Page 39



Style 560
Page 34



Style 565
Page 24



Style 568
Page 25



Style 583
Page 39



Style 590*
Page 39



Style 723
Page 35



Style 757
Page 37



Style 759
Page 37



Style 777
Page 37



Style 779
Page 37



Style 797
Page 37



Style 799
Page 37



Style 823
Page 26



Style 877
Page 35



**Styles
825 / 845 / 855**
Page 29



**Styles
875 / 895 / 898**
Page 29



Style 879
Page 35



Style 891*
Page 27

*) Not available as ThermoSafe Hybrid

THERMOPLAN HYBRID



Style 138
Page 46



Style 189
Page 46



Style 501
Page 46



Style 502
Page 46



Style 503
Page 46



Style 504
Page 46



Style 505
Page 46



Style 565
Page 48



Style 568
Page 48



Style 686
Page 46



Style 689
Page 47



Style 823
Page 48



Style 860
Page 48



Style 862
Page 47



Style 867
Page 47



Style 871
Page 47



Style 872
Page 47

THERMOCARBON



Style 189
Page 52



Style 300
Page 52



Style 301
Page 52



Style 305
Page 52



Style 306
Page 53



Style 308
Page 53



Style 312
Page 53



Style 314
Page 53



Style 504
Page 53



Style 650
Page 55



Style 680
Page 55



Style 686
Page 55



Style 862
Page 55

→ Further information can be found starting on page 44.

→ Further information can be found starting on page 50.

TOPCOMFORT

NEW. TOPCOMFORT PORTAL



Style 302
Page 52



Style 304
Page 52



Style 100
Page 58



Style 101
Page 58



NEW. Style 138
Page 62



NEW. Style 501
Page 62



Style 309
Page 53



Style 310
Page 53



Style 100
MG 111
Page 58



Style 100
MG 112
Page 59



NEW. Style 503
Page 62



NEW. Style 504
Page 62



Style 565
Page 55



Style 568
Page 55



Style 100
MG 113
Page 59



Style 100
MG 114
Page 59



NEW. Style 565
Page 63



NEW. Style 568
Page 63



Style 823
Page 55



Style 860
Page 55




Style 100
MG 115
Page 59



Style 100
MG 116
Page 59



NEW. Style 860
Page 63



Style 100
MG 117
Page 59

→ Further information can be found starting on page 56.

→ Further information can be found starting on page 60.







ThermoSafe

ThermoSafe Hybrid



Flush-fitting transition
on the inside



RC3 security
As standard for all ThermoSafe doors and all ThermoSafe Hybrid doors with glazing



RC4 security
As standard for all ThermoSafe Hybrid doors without glazing



Acoustic insulation
Up to 30 dB (ThermoSafe)
Up to 33 dB (ThermoSafe Hybrid)



Very good thermal insulation
 U_D -value of up to 0.87 W/(m²·K)

Only from Hörmann



Door leaf exterior made of stainless steel with high-quality powder coating
ThermoSafe Hybrid

EXCLUSIVE CLASS. Our best-selling aluminium entrance door ThermoSafe meets the highest of design standards with a choice of over 75 styles. The flush-fitting transition from the door leaf to the door frame gives your doors an elegant interior look in perfect harmony with flush-closing residential internal doors.


TOP CLASS. Made of powder-coated stainless steel sheet with high-quality powder coating, the exterior of the ThermoSafe Hybrid door leaf guarantees particularly high dimensional stability, even in case of large temperature differences inside and outside, as well as improved acoustic insulation.

Solid door view on the outside (left figure) and inside (right figure) as well as a flush-fitting transition from the door leaf to the door frame on the inside




PAGE 20 – 21. Aluminium entrance door ThermoSafe style 861, stainless steel handle HOE 700, Anthracite grey RAL 7016 matt, optional side elements; M-ribbed Silkgrain sectional garage door, Anthracite grey RAL 7016 matt

LEFT. Aluminium entrance door ThermoSafe style 871, stainless steel lever handle CARO with round rose escutcheon, inside Traffic white RAL 9016 matt, optional concealed hinges and side elements

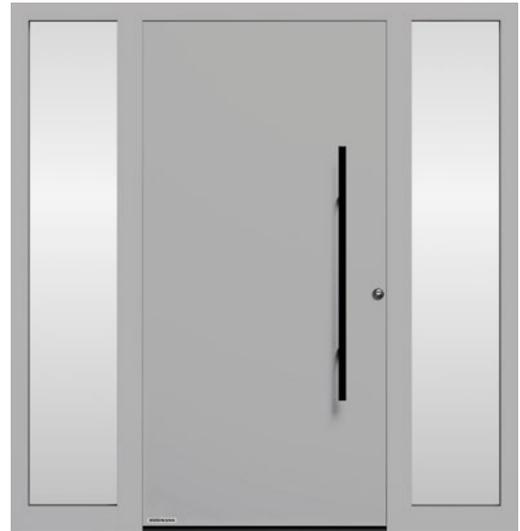

Style 860

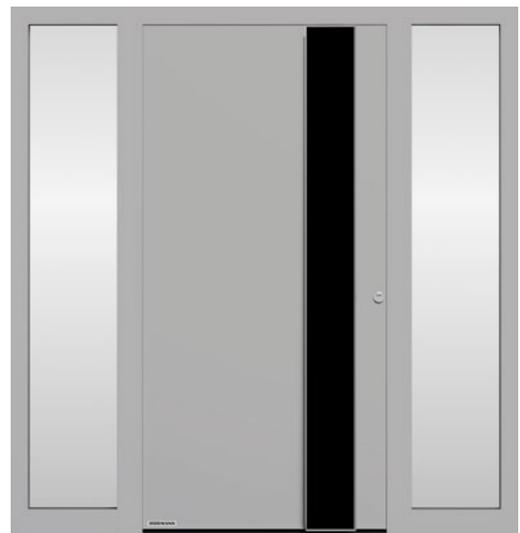

Style 565

THERMOSAFE / THERMOSAFE HYBRID

All door styles on this page in White aluminium, RAL 9006 silk-gloss


Style 860 stainless steel handle HOE 501 black.edition in Jet black RAL 9005 matt fine structure (optional), side elements with matt float ornamental glass

Style 565 design handle G 760 black.edition in Jet black RAL 9005 matt fine structure (optional) **1**, optionally with integrated LED light strip, side elements with matt float ornamental glass

Style 568 design handle G 750 black.edition in Jet black RAL 9005 matt fine structure (optional) **2**, optionally with integrated LED light strip, side elements with matt float ornamental glass

Style 551 stainless steel hand-crafted handle HOE 150, side elements with matt float ornamental glass

→ You will find all colours and surface finishes from page 90.

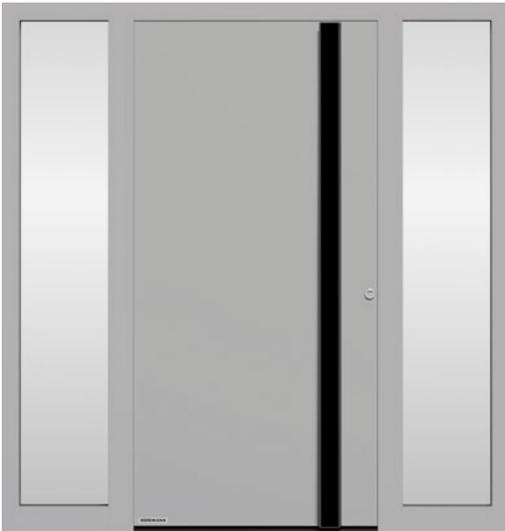

Style 568




Style 551



2



Style 823

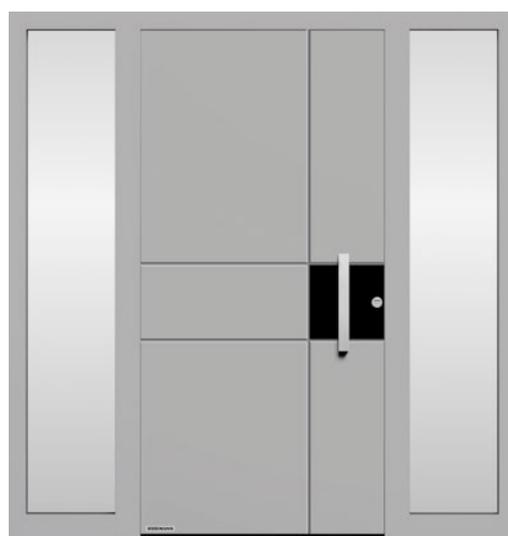

Style 832

THERMOSAFE / THERMOSAFE HYBRID

All door styles on this page in White aluminium, RAL 9006 silk-gloss

Style 823 handle profile black.edition in Jet black RAL 9005 matt fine structure (optional), fixing profiles in door colour, optionally with LED spotlight in the handle **3**, **NEW**. Black glass side elements


Style 832 stainless steel handle HOE 820, application in Jet black RAL 9005 matt fine structure (optional), with horizontal and vertical stainless steel pilaster strips, side elements with matt float ornamental glass

Style 836 stainless steel handle HOE 820 **4**, flush-fitting application in Jet black RAL 9005 matt fine structure (optional), side elements with matt float ornamental glass


Style 891* stainless steel handle HOE 820, side elements with matt float ornamental glass

* Not available as ThermoSafe Hybrid

→ You will find all colours and surface finishes from page 90.

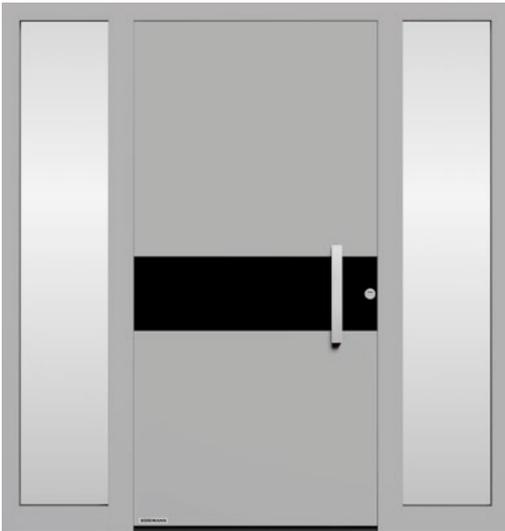

Style 836

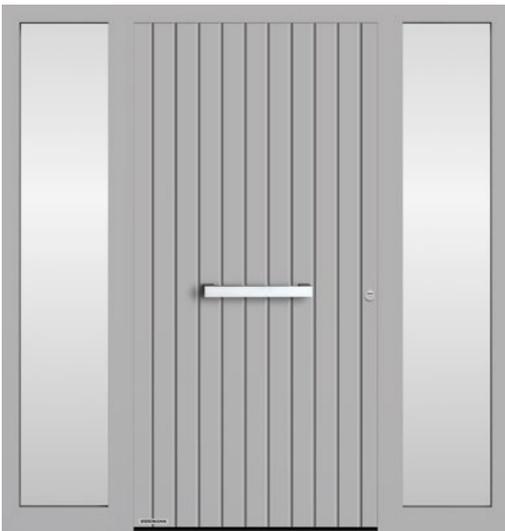

Style 891



4




Only from Hörmann

PERFECTLY MATCHING ENTRANCE DOOR AND GARAGE DOOR.

The extensive Hörmann range with matching products provides you with aligned entrance door and garage door ribbing options for a matching appearance.

The result: No offset from the base line. You will see: The beauty of your home is reflected in these small but crucial details.

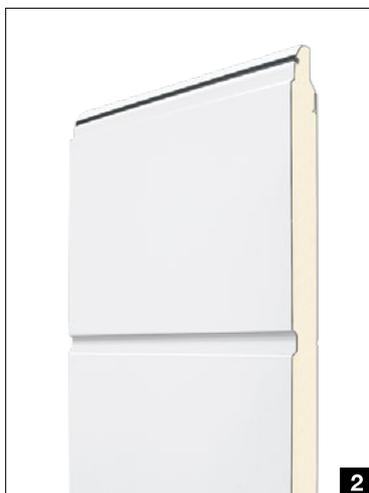

The cross-section of the entrance **1** and garage door **2** clearly shows the ribbed look of the entrance door is a result of the grooves in the infill. In the garage door, it comes from the ribbing of the individual sections and the section transitions. The aligned appearance also applies if the entrance door has a different installation height than the garage door. We can adjust the groove heights individually according to your specifications, all we need is the height offset. After precise measurement on site, your Hörmann specialist dealer will advise you on the ideal overall look based on these entrance door styles.




Style 825 / 845 / 855



Sectional garage door
M-ribbed Silkgrain, Traffic white RAL 9016 matt



Style 875 / 895 / 898

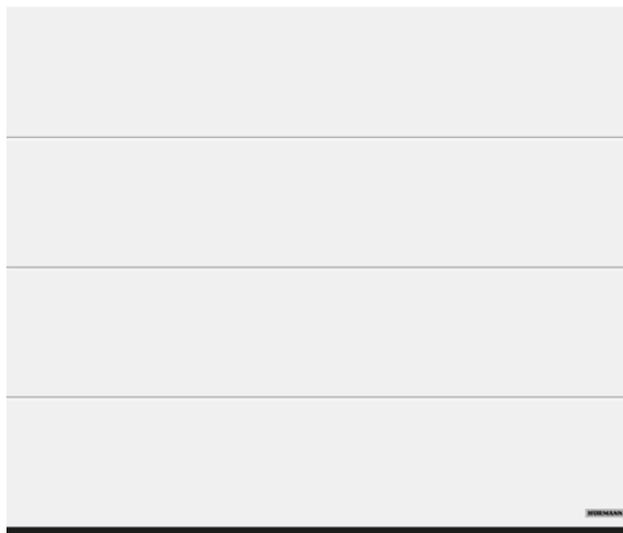

Sectional garage door
L-ribbed Silkgrain, Traffic white RAL 9016 matt

THERMOSAFE / THERMOSAFE HYBRID

All door styles on this page in Traffic white RAL 9016 matt

Style 825 with a door height of 2000 mm

Style 845 with a door height of 2125 mm

Style 855 with a door height of 2250 mm

Style 875 with a door height of 2000 mm

Style 895 with a door height of 2125 mm

Style 898 with a door height of 2250 mm


→ You will find all colours and surface finishes from page 90.



For more detailed information on the garage doors, please see the "Sectional garage doors" brochure.



Style 188

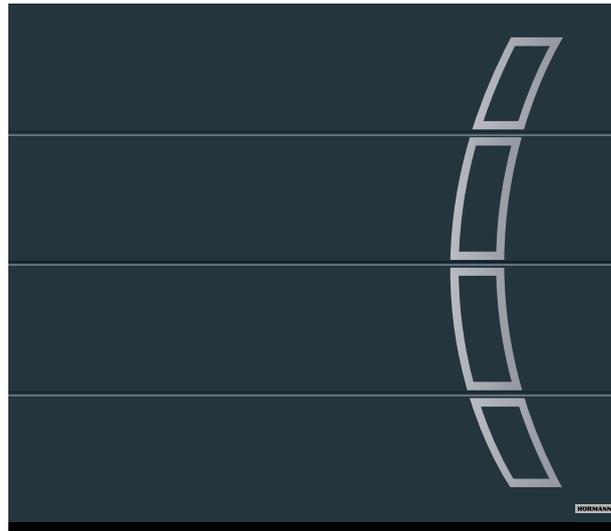

Sectional garage door
L-ribbed design style 457 in Silkgrain, Anthracite grey RAL 7016 matt



Style 693



Style 861



Sectional garage door
M-ribbed, Silkgrain Anthracite grey RAL 7016 matt



Style 862


MATCHING ENTRANCE AND GARAGE DOORS. With matching design elements and styles, your entrance door becomes an attractive eye-catcher combined with the sectional garage door. In these styles, the groove spacing of the entrance door and the ribbing spacing of the garage door are not completely flush.



Style 871



Style 173

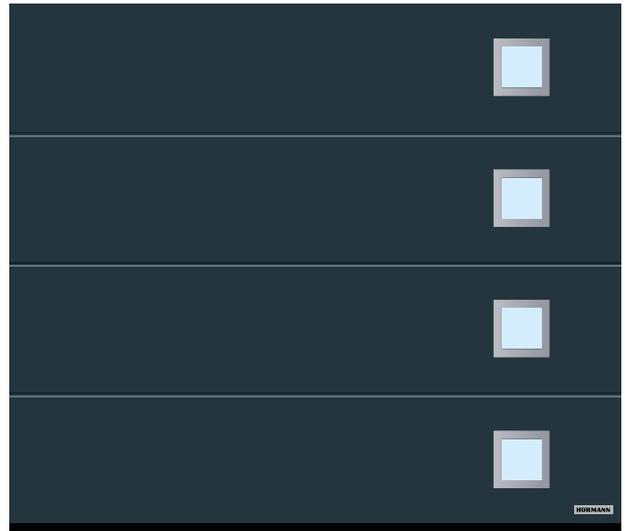

Sectional garage door

L-ribbed design style 461 in Silkgrain, Anthracite grey RAL 7016 matt



Style 872



Sectional garage door

D-ribbed, Silkgrain Anthracite grey RAL 7016 matt

THERMOSAFE / THERMOSAFE HYBRID

All door styles on this double-page spread in Anthracite grey RAL 7016 matt fine structure

Style 188 stainless steel handle HOE 100, matt float design glass with 3 clear stripes

Style 693 stainless steel handle HOE 300

Style 871 stainless steel handle HOE 620

Style 173 stainless steel handle HOE 300, optionally with matt float ornamental glass

Style 861 stainless steel handle HOE 700

Style 862 stainless steel handle HOE 620

Style 872 stainless steel handle HOE 615, side elements with matt float ornamental glass

→ You will find all colours and surface finishes from page 90.



72

HORMANN



Style 75



Style 65



Style 504




Style 650



Style 680



Style 689

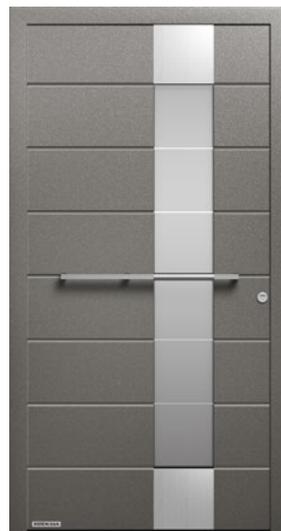

Style 697



Style 867

THERMOSAFE / THERMOSAFE HYBRID

All door styles on this page in Grey aluminium RAL 9007 matt fine structure

Style 75 stainless steel handle 38-1, Master-Carré ornamental glass

Style 65 stainless steel handle HOE 600, matt float design glass with 7 clear stripes

Style 504 stainless steel handle HOE 500, matt float design glass with 5 clear horizontal stripes

Style 650 stainless steel handle HOE 501 black.edition in Jet black RAL 9005 matt fine structure (optional), **NEW**. Black glass (optional)

Style 680 stainless steel handle HOE 700, Pave white ornamental glass

Style 689 stainless steel handle 38-2, matt Parsol grey design glass with 7 clear stripes

Style 697 stainless steel handle HOE 910, matt Parsol grey design glass with 7 clear stripes

Style 867 stainless steel handle HOE 620, matt float design glass with 7 clear stripes

→ You will find all colours and surface finishes from page 90.

LEFT. Aluminium entrance door ThermoSafe style 504, stainless steel handle HOE 500, Window grey RAL 7040 matt



Style 110



Style 138



Style 136



Style 140



Style 166



Style 560

THERMOSAFE / THERMOSAFE HYBRID

All door styles on this page in Hörmann colour CH 703-AM Anthracite Metallic matt fine structure

Style 110 stainless steel handle 38-1, Cathedral white ornamental glass (optional)

Style 138 stainless steel handle HOE 500, Satinato ornamental glass

Style 136 stainless steel handle 38-1, Satinato design glass with 7 matt stripes, side elements with Satinato ornamental glass

Style 140 stainless steel handle 38-1, stainless steel application, Pave white ornamental glass

Style 166 stainless steel handle 38-1, stainless steel application, Satinato design glass with 7 matt stripes

Style 560 stainless steel handle HOE 600, matt float design glass with 11 stripes, side elements with matt float ornamental glass


→ You will find all colours and surface finishes from page 90.



Style 723



Style 189

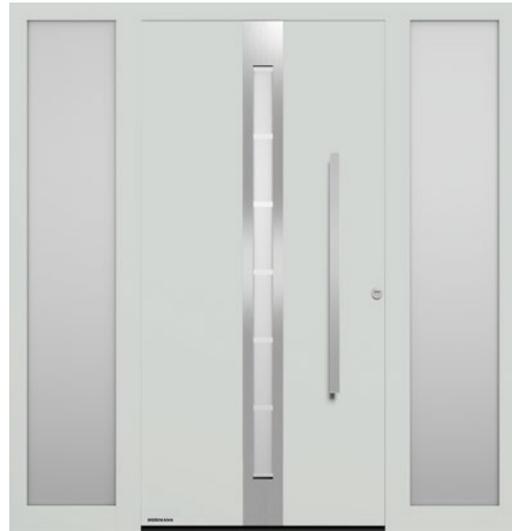

Style 686



Style 185



Style 503



Style 877



Style 879

THERMOSAFE / THERMOSAFE HYBRID

All door styles on this page in Light grey RAL 7035 matt

Style 723 handle profile in White aluminium RAL 9006, fixing profiles in door colour, Satinato ornamental glass

Style 189 stainless steel handle HOE 615, matt float design glass with 7 clear stripes

Style 686 stainless steel handle HOE 600, stainless steel application, matt float design glass with 7 clear stripes, side elements with sand-blasted float ornamental glass

Style 185 stainless steel handle 38-2, white Master-Carré ornamental glass

Style 503 stainless steel handle HOE 500, matt float design glass with 7 clear horizontal stripes

Style 877 stainless steel handle HOE 610, matt float design glass with 3 clear stripes

Style 879 design handle G 750 in anodised aluminium E6 / EV 1, matt float design glass with 3 clear stripes

→ You will find all colours and surface finishes from page 90.



Style 176



Style 177



Style 501



Style 502



Style 514



NEW. Style 524

THERMOSAFE / THERMOSAFE HYBRID

All door styles on this page in Traffic white RAL 9016 matt

Style 176 stainless steel handle HOE 735, Satinato ornamental glass

Style 177 stainless steel handle HOE 700, Pave white ornamental glass

Style 501 stainless steel handle HOE 500, Satinato glazing

Style 502 stainless steel handle HOE 500, Satinato glazing

Style 514 design handle G 750 in White aluminium RAL 9006 silk-gloss, clear float glazing, side elements with sand-blasted float ornamental glass

Style 524 design handle G 750 and applications in Jet black RAL 9005 matt fine structure (optional), **NEW.** Glazing with black glass,

NEW. Side elements with black glass

→ You will find all colours and surface finishes from page 90.



Style 757



Style 759



Style 777



Style 779



Style 797



Style 799

THERMOSAFE / THERMOSAFE HYBRID

All door styles on this page in Quartz grey RAL 7039 matt fine structure

Style 757 stainless steel handle HOE 797, matt float design glass with clear stripes

Style 759 design handle G 750 in anodised aluminium E6 / EV 1, matt float design glass with clear stripes

Style 777 stainless steel handle HOE 610, matt float ornamental glass

Style 779 design handle G 750 in anodised aluminium E6 / EV 1, matt float ornamental glass

Style 797 stainless steel handle HOE 797, matt float ornamental glass

Style 799 design handle G 750 in anodised aluminium E6 / EV 1, matt float ornamental glass

→ You will find all colours and surface finishes from page 90.





Style 40



Style 45



Style 505



Style 552



Style 553



Style 583



Style 590

THERMOSAFE / THERMOSAFE HYBRID

All door styles on this page in Traffic white RAL 9016 matt

Style 40 stainless steel handle HOE 550, partially matt design glass, side elements with sand-blasted float ornamental glass

Style 45 stainless steel handle HOE 200, matt Parsol grey design glass with 4 clear stripes

Style 505 stainless steel handle HOE 500, matt float design glass with 4 clear stripes

Style 552 hand-crafted stainless steel handle HOE 150, matt float design glass with clear stripes and red colour stripes

Style 553* aluminium handle G 753 in silver, matt Reflo design glass with genuine fluted glass

Style 583 colour application in Slate grey RAL 7015 matt, aluminium handle G 755, matt Reflo design glass with clear edge

Style 590* colour application in Slate grey RAL 7015 matt, design handle G 750, Reflo design glass with genuine fluted glass and sand-blasted design

* Not available as ThermoSafe Hybrid

→ You will find all colours and surface finishes from page 90.

LEFT. Aluminium entrance door ThermoSafe style 553, Traffic white RAL 9016 matt, optional side elements



STYLISH INSIDE AND OUT. On request, the inside of our classic designs is available in a door view matching the outside. Your entrance door harmonises perfectly with classic residential internal doors in your home.



Interior view with smooth door leaf as standard



Optional interior view taking style 416 as an example



Style 402



Style 413



Style 414



Style 416



Style 445



Style 675



Style 694

THERMOSAFE / THERMOSAFE HYBRID

All door styles on this page in Traffic white RAL 9016 matt

Style 402 stainless steel handle 14-2, ornamental frame, partially matt Reflo design glass with genuine fluted glass

Style 413 stainless steel handle 14-2, ornamental frame, Silk ornamental glass

Style 414 stainless steel handle 14-2, ornamental frame, Silk ornamental glass

Style 416 stainless steel handle 14-2, ornamental frame

Style 445 stainless steel handle 38-1, ornamental frame, Chinchilla ornamental glass, side elements with Chinchilla ornamental glass

Style 675 stainless steel handle 38-1, ornamental frame, Reflo design glass with genuine fluted glass

Style 694 stainless steel handle HOE 700, ornamental frame, Reflo design glass with genuine fluted glass

→ You will find all colours and surface finishes from page 90.

TOP LEFT. Aluminium entrance door ThermoSafe style 421, stainless steel handle 14-2, Light grey RAL 7035 matt, optional side elements



Style 453



Style 451



Style 452



TOP. Detailed view of ornamental frame with design glass



Style 455



Style 456



Style 457

THERMOSAFE / THERMOSAFE HYBRID

All door styles on this page in Stone grey RAL 7030 matt fine structure

Style 453 stainless steel handle 14-2, ornamental frame

Style 451 stainless steel handle 14-2, ornamental frame, sand-blasted Reflo design glass with non-matt edge

Style 452 stainless steel handle 14-2, ornamental frame, sand-blasted Reflo design glass with non-matt edge

Style 455 stainless steel handle 14-2, ornamental frame, sand-blasted Reflo design glass with non-matt edge

Style 456 stainless steel handle 14-2, ornamental frame, sand-blasted Reflo design glass with non-matt edge

Style 457 stainless steel handle 14-2, ornamental frame, side elements with Satinato ornamental glass

→ You will find all colours and surface finishes from page 90.



Style 407



Style 419



Style 420



Style 421




Style 422



Style 454



Style 459

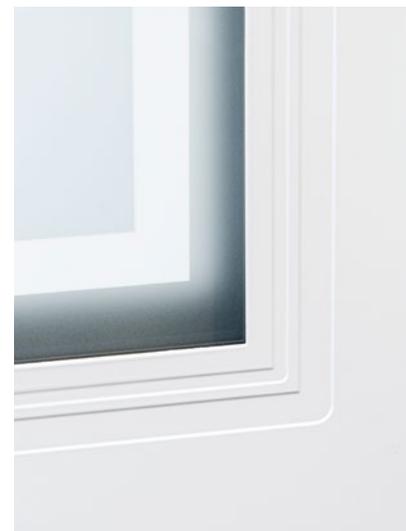

TOP: Detailed view of the milled grooves and of the design glass with non-matt edge

THERMOSAFE / THERMOSAFE HYBRID

All door styles on this page in Traffic white RAL 9016 matt

Style 407 stainless steel handle 14-2, milled grooves, matt float design glass with non-matt edge

Style 419 stainless steel handle 14-2, ornamental frame, leaded ornamental design glass with sand-blasted Reflo base glass (optional)

Style 420 stainless steel handle 14-2, ornamental frame, sand-blasted Reflo design glass with non-matt edge

Style 421 stainless steel handle 14-2, ornamental frame

Style 422* stainless steel handle 14-2, milled grooves, sand-blasted Reflo design glass with non-matt edge

Style 454* stainless steel handle 14-2, milled grooves, sand-blasted Reflo design glass with non-matt edge

Style 459* stainless steel handle 14-2, milled grooves, solid style

* Not available as ThermoSafe Hybrid

→ You will find all colours and surface finishes from page 90.



ThermoPlan Hybrid



Flush-fitting transition
on the interior and exterior




RC3 security
As standard



Acoustic insulation
Up to 33 dB



Very good thermal insulation
 U_D -value of up to 0.78 W/(m²·K)




Door leaf exterior made of stainless steel with high-quality powder coating

DESIGN CLASS. What's special about this door is its elegant, flush appearance. You will not be able to see and feel any offset on the inside and outside between the door leaf and door frame.

DIMENSIONALLY STABLE. The stainless steel sheet with high-quality powder coating on the outside guarantees particularly high dimensional stability, even in case of large temperature differences, allowing you to enjoy the flush-fitting appearance of your entrance door for the long-term.

ACOUSTIC INSULATION. Benefit from improved acoustic insulation of up to 33 dB thanks to the stainless steel sheet on the outside and thicker door leaf.

Solid door view and flush-fitting transition from the door leaf to the door frame on the outside **1** and inside **2**

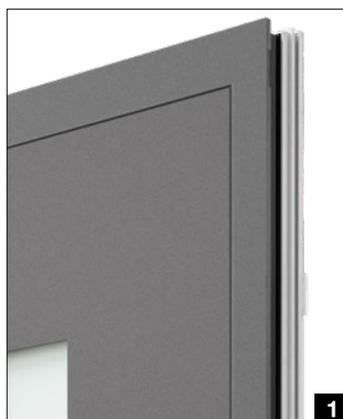

LEFT. Aluminium entrance door ThermoPlan Hybrid style 860, stainless steel handle HOE 710, Hörmann colour CH 703-AM Anthracite Metallic matt fine structure, optional side element




Style 138



Style 189



Style 501

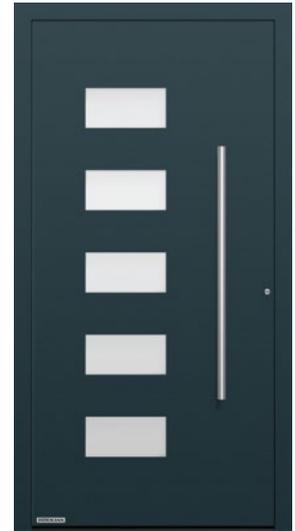

Style 502



Style 503



Style 504



Style 505



Style 686

THERMOPLAN HYBRID


All door styles on this page in Anthracite grey RAL 7016 matt fine structure

- Style 138** stainless steel handle HOE 500, Satinato ornamental glass
- Style 189** stainless steel handle HOE 615, matt float design glass with 7 clear stripes
- Style 501** stainless steel handle HOE 500, Satinato glazing
- Style 502** stainless steel handle HOE 500, Satinato glazing
- Style 503** stainless steel handle HOE 500, matt float design glass with 7 clear stripes
- Style 504** stainless steel handle HOE 500, matt float design glass with 5 clear stripes
- Style 505** stainless steel handle HOE 500, matt float design glass with 4 clear stripes
- Style 686** stainless steel handle HOE 615, matt float design glass with 7 clear stripes

→ You will find all colours and surface finishes from page 90.



Style 689

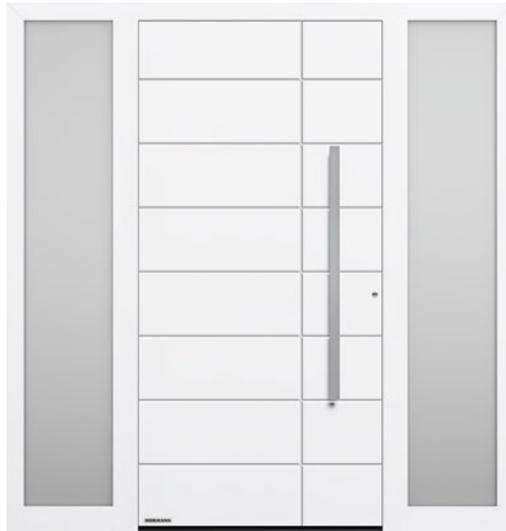

Style 862



Style 867



Style 871



Style 872

THERMOPLAN HYBRID

All door styles on this page in Traffic white RAL 9016 matt

Style 689 stainless steel handle 38-2, matt Parsol grey design glass with 7 clear stripes

Style 862 stainless steel handle HOE 620, side elements with sand-blasted float ornamental glass

Style 867 stainless steel handle HOE 620, matt float design glass with 7 clear stripes

Style 871 stainless steel handle HOE 620, side elements with sand-blasted float ornamental glass

Style 872 stainless steel handle HOE 615, side elements with sand-blasted float ornamental glass

→ You will find all colours and surface finishes from page 90.



Style 565



Style 568



Style 823



Style 860

THERMOPLAN HYBRID

All door styles on this page in Traffic white RAL 9016 matt

Style 565 design handle G 760 in White aluminium RAL 9006 silk-gloss, handle application in White aluminium RAL 9006 silk-gloss, side elements with matt float ornamental glass

Style 568 design handle G 750 in White aluminium RAL 9006 silk-gloss, side elements with matt float ornamental glass

Style 823 handle profile in White aluminium RAL 9006 silk-gloss, fixing profiles in door colour, side elements with matt float ornamental glass

Style 860 stainless steel handle HOE 700, side elements with matt float ornamental glass

→ You will find all colours and surface finishes from page 90.

RIGHT. Aluminium entrance door ThermoPlan Hybrid style 568, design handle G 750 anodised E6 / EV1, Anthracite grey RAL 7016 matt fine structure, optional side elements



2

HÖRMANN



ThermoCarbon



Thick rebate
on the inside



RC3 security
As standard



RC4 security
Optional



Acoustic insulation
Up to 29 dB



Excellent thermal insulation



Only from Hörmann


ThermoCarbon with a U_b -value
of up to $0.47 \text{ W}/(\text{m}^2\cdot\text{K})$

PREMIUM CLASS. With the 100 mm thick high-tech leaf profile made of a carbon glass-fibre hybrid material, we can realise entrance doors with heights of up to 3000 mm. The many styles of flush-fitting lever handles meet the highest of design standards. With a subtle thick rebate, the inside of the door blends perfectly with your interior design.

Style 308 with flush-fitting exterior handle




LEFT. Aluminium entrance door ThermoCarbon style 568, design handle G 750 anodised E6 / EV1, door height 3000 mm, Anthracite grey RAL 7016 matt fine structure, optional side element

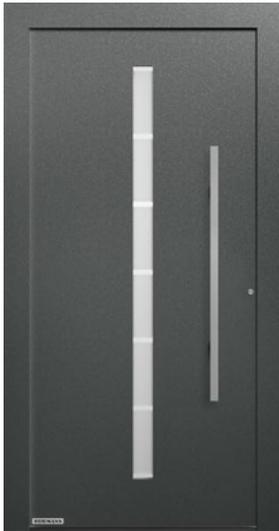

Style 189



Style 300

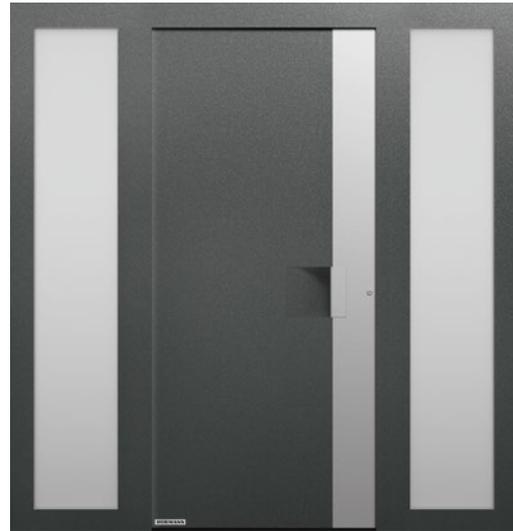

Style 301



Style 302



Style 304



Style 305

THERMOCARBON

All door styles on this page in Hörmann colour CH 703-AM Anthracite Metallic matt fine structure

Style 189 stainless steel handle HOE 615, matt float design glass with 7 clear stripes

Style 300 handle bar in White aluminium RAL 9006 silk-gloss

Style 301 flush-fitting aluminium application and handle bar in White aluminium RAL 9006 silk-gloss, side elements with matt float ornamental glass

Style 302 flush-fitting handle bar in White aluminium RAL 9006 silk-gloss, matt float design glass with a clear, vertical stripe

Style 304 recessed grip in White aluminium RAL 9006 silk-gloss, flush-fitting stainless steel handle

Style 305 aluminium application in Ruby red RAL 3003 matt, recessed grip in Hörmann colour CH 703-AM Anthracite Metallic matt fine structure, flush-fitting stainless steel handle, side elements with Micrograin ornamental glass

→ You will find all colours and surface finishes from page 90.



Style 306



Style 308



Style 309



Style 310



Style 312



Style 314



Style 504

THERMOCARBON

All door styles on this page in Traffic white RAL 9016 matt

Style 306 recessed grip in Traffic white RAL 9016 matt, flush-fitting stainless steel handle, matt float ornamental glass

Style 308 handle bar and recessed grip in Anthracite grey RAL 7016 matt

Style 309 flush-fitting handle bar in White aluminium RAL 9006 silk-gloss

Style 310 flush-fitting stainless steel handle, matt float ornamental glass

Style 312 flush-fitting handle bar in White aluminium RAL 9006 silk-gloss, matt float design glass with a clear, vertical stripe, side elements with matt float ornamental glass (solid)

Style 314 recessed grip in Traffic white RAL 9016 matt, flush-fitting stainless steel handle, matt float ornamental glass

Style 504 stainless steel handle HOE 500, matt float design glass with 5 clear stripes

→ You will find all colours and surface finishes from page 90.





Style 565



Style 568



Style 650



Style 680



Style 686



Style 823



Style 860



Style 862

THERMOCARBON

All door styles on this page in Slate grey RAL 7015 matt fine structure

Style 565 design handle G 760 in anodised aluminium E6 / EV 1, handle application in anodised aluminium E6 / EV 1

Style 568 design handle G 750 anodised E6 / EV1

Style 650 stainless steel handle HOE 700, Pave white ornamental glass

Style 680 stainless steel handle HOE 700, Pave white ornamental glass

Style 686 stainless steel handle HOE 610, matt float design glass with 7 clear stripes

Style 823 handle profile in White aluminium RAL 9006 silk-gloss, fixing profiles in door colour

Style 860 stainless steel handle HOE 700

Style 862 stainless steel handle HOE 620

→ You will find all colours and surface finishes from page 90.

LEFT. Aluminium entrance door ThermoCarbon style 680, stainless steel handle HOE 700, Slate grey RAL 7015 matt fine structure, optional side elements



TopComfort



RC2 security
Optional



RC3 security
Optional



Acoustic insulation
Up to 39 dB (depending on glass type)



Good thermal insulation
 U_D -value of up to 1.3 W/(m²·K)

ENTRANCES FILLED WITH LIGHT. Our TopComfort glass entrance doors create a bright and cheerful entrance area with solid equipment – ideal for blocks of flats or commercial entrances. You can choose between 9 exclusive glass door styles that differ in terms of glass design, transparency and how much light they let in.

DOOR OPERATOR HDO. Open and close your TopComfort entrance door easily and automatically. The inconspicuous Flatscan sensor monitors the area of travel and ensures safe operation. The operator can be conveniently operated via buttons, radar movement detectors and with hand transmitters or radio switches with BiSecur radio technology.

Door operator HDO 200 in combination with a door version without threshold incl. retractable bottom seal is the ideal solution for barrier-free entrances.



LEFT. Aluminium entrance door TopComfort, stainless steel handle HOE 701, Anthracite grey RAL 7016 matt, optional side elements and integrated letter box system



Style 100



Style 100 design glass or
ornamental glass on request



Style 101



Style 100 MG 111

TOPCOMFORT

All door styles on this page in Traffic white RAL 9016 matt

Style 100 stainless steel handle 38-1, Master-Carré ornamental glass, side elements from Master-Carré ornamental glass

Style 100 design glass, on request stainless steel handle HOE 710, matt float design glass with 7 clear stripes

Style 101 stainless steel handle 38-1, Master-Carré ornamental glass, side elements from Master-Carré ornamental glass

Style 100 MG 111 stainless steel handle 38-2, Parsol grey matt design glass with 7 continuous clear stripes, side elements with Parsol grey matt design glass with 7 continuous clear stripes

→ You will find all colours and surface finishes from page 90.



Style 100 MG 112



Style 100 MG 113




Style 100 MG 114



Style 100 MG 115



Style 100 MG 116

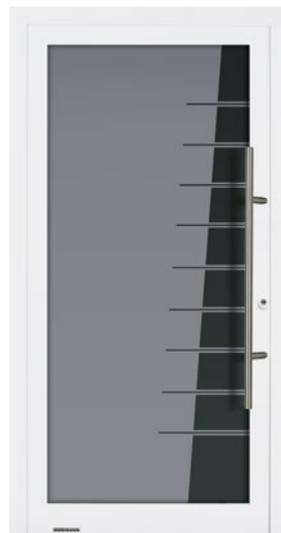

Style 100 MG 117

TOPCOMFORT

All door styles on this page in Traffic white RAL 9016 matt

Style 100 MG 112, stainless steel handle 38-2, Micrograin design glass with horizontal texture

Style 100 MG 113 stainless steel handle 38-2, design glass with 25 matt stripes

Style 100 MG 114 stainless steel handle 38-2, matt design glass with clear semi-circles and stripes

Style 100 MG 115 stainless steel handle 38-2, matt design glass with rectangles

Style 100 MG 116 stainless steel handle 38-2, design glass with matt stripes and crescent

Style 100 MG 117 stainless steel handle 38-2, matt design glass with 9 clear stripes

→ You will find all colours and surface finishes from page 90.



NEW.

TopComfort Portal



Acoustic insulation

Up to 29 dB



Good thermal insulation

U_D -value of up to $1.2 \text{ W}/(\text{m}^2\cdot\text{K})$

MORE CLEAR PASSAGE WIDTH FOR REPRESENTATIVE ENTRANCE PORTALS.

Our double-leaf entrance doors with aluminium frame construction and interior PU foam fill offer optimal thermal insulation (U_D -value of up to approx. $1.2 \text{ W}/(\text{m}^2\cdot\text{K})$). Elegant door view with aluminium sheets overlapping the leaf on the exterior and interior. And our double-leaf entrance doors feature an impressive flush-fitting transition from the traffic leaf to the fixed leaf. You can choose between 7 door styles and door sizes up to 2600 mm wide and 2500 mm high.


Solid door view on the outside **1** and inside **2**




LEFT. Aluminium entrance door TopComfort Portal style 860, stainless steel handle HOE 710, Anthracite grey RAL 7016 matt fine structure




NEW. Style 138

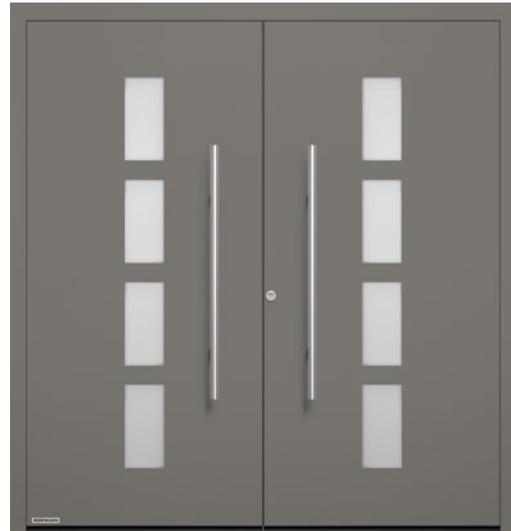

NEW. Style 501

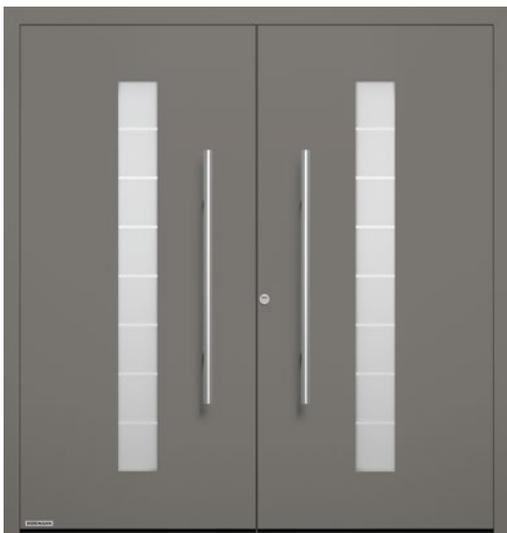

NEW. Style 503

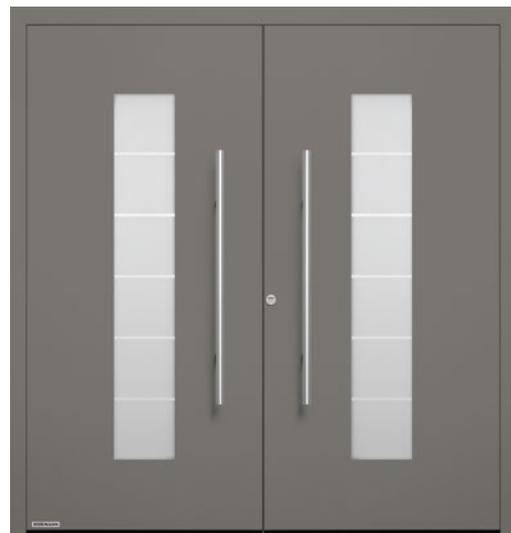

NEW. Style 504

TOPCOMFORT PORTAL

All door styles on this page in Grey aluminium RAL 9007 matt fine structure

Style 138 stainless steel handle HOE 500, Satinato ornamental glass

Style 501 stainless steel handle HOE 500, Satinato glazing

Style 503 stainless steel handle HOE 500, matt float design glass with 7 clear stripes

Style 504 stainless steel handle HOE 500, matt float design glass with 5 clear stripes


→ You will find all colours and surface finishes from page 90.



NEW. Style 565



NEW. Style 568

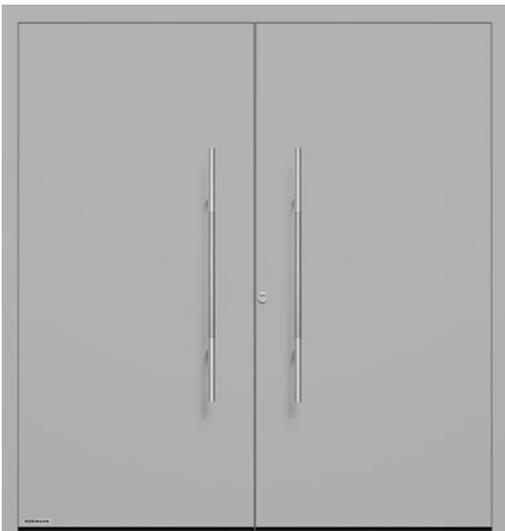

NEW. Style 860

TOPCOMFORT PORTAL

All door styles on this page in White aluminium, RAL 9006 silk-gloss

Style 565 design handle G 760 in White aluminium RAL 9006 silk-gloss, handle application in White aluminium RAL 9006 silk-gloss

Style 568 design handle G 750 in White aluminium RAL 9006 silk-gloss

Style 860 stainless steel handle HOE 700

→ You will find all colours and surface finishes from page 90.





Individualisation

MATCHING DOOR AND GARAGE DOOR. With our MatchColor colours and Decoral decors (further information can be found from page 68 onwards), you can look forward to a lifetime of identical colours and decors for your entrance door and sectional garage door. Want your entrance door and garage door in perfect harmony? Then combine your new entrance door with our perfectly matched sectional garage door styles (you can find more information from page 28) and residential internal door styles.





PAGE 64 – 65. Aluminium entrance door ThermoPlan Hybrid style 871, stainless steel handle HOE 620, exterior Jet black RAL 9005 matt fine structure, optional side elements; LPU 67 Thermo L-ribbed Silkgrain sectional garage door, Jet black RAL 9005 matt


TOP. Aluminium entrance door ThermoSafe style 173, stainless steel handle HOE 300, Quartz grey RAL 7039 matt, optional side elements; L-ribbed Silkgrain Quartz grey RAL 7039 matt sectional garage door with design style 461 glazing elements

BOTTOM LEFT. Aluminium entrance door ThermoSafe style 693, stainless steel lever handle CARO with round rose escutcheon, internal design Groove 15 matching residential internal door DesignLine Groove 15, lacquer Traffic white RAL 9016 matt

BOTTOM RIGHT. Aluminium entrance door ThermoCarbon style 308, handle bar and recessed grip in Anthracite grey RAL 7016 matt, Ruby Red RAL 3003 matt, frame in Anthracite grey RAL 7016 matt, optional side element



THERMOSAFE DECORAL. The 18 exclusive entrance door styles in the five decors offer a coordinated matching look in combination with Duragrain sectional garage doors and meet even exacting design requirements. The standard frame profile in Jet black, the optional exterior handles and the applications in Jet black all add a special touch of elegance.



For further information, see the "Entrance door and garage door with a matching look" brochure.



LEFT. Aluminium entrance door ThermoSafe, style 860, stainless steel handle HOE 710, door leaf in Decoral Barnwood grey, door frame in Jet black RAL 9005 matt fine structure, optional side elements; L-ribbed, Duragrain Barnwood grey sectional garage door

TOP RIGHT. Aluminium entrance door ThermoSafe, style 860, handle HOE 501 black.edition in Jet black RAL 9005 matt fine structure, door leaf in Decoral Barnwood optional side elements; L-ribbed Duragrain Barnwood sectional garage door

BOTTOM RIGHT. Aluminium entrance door ThermoSafe, style 860, handle HOE 501 black.edition in Jet black RAL 9005 matt fine structure, door leaf in Decoral cement, optional side elements; L-ribbed Duragrain cement sectional garage door



GENEROUS ENTRANCES. Create stylish, attractive entrances and fill your home with more light. Each entrance door style shown can be combined with side elements and transom lights. The glazings are also totally up to you: either matching the entrance door style or tailored to your taste.

→ Further information can be found starting on page 92.

PRACTICAL LETTER BOX SYSTEMS. Integrate our elegant letterboxes with optional surface finish in your preferred colour, RAL of choice or stainless steel into the side element of your entrance door. Add light switches, intercom mesh and bell buttons to suit your own individual taste.

→ Available for ThermoSafe and TopComfort





TOP LEFT. Aluminium entrance door TopComfort style 101, stainless steel handle HOE 701, Hörmann colour CH 703-AM Anthracite Metallic matt fine structure, optional side elements and integrated letterbox

TOP RIGHT. Aluminium entrance door ThermoSafe style 568, design handle G 750 anodised E6 / EV1, Hörmann colour CH 703-AM Anthracite Metallic matt fine structure, optional side elements and transom light

BOTTOM. Aluminium entrance door ThermoSafe, style 504, stainless steel handle HOE 501 black.edition in Jet black RAL 9005 matt fine structure, door leaf in Decoral cement, **NEW**. Black glazing, **NEW**. Optional black glass side element





OPERATING COMFORT FOR YOUNG AND OLD. Open your entrance door easily and conveniently with our smart solutions. By code, fingerprint or smartphone. With our lock packages, you are sure to find an intelligent solution that meets your needs. With the Hörmann homee Smart Home control centre, you can conveniently control your Hörmann garage and entrance gate, as well as climatic sensors or a camera all with an app. At any time of day or night, from anywhere around the world.

→ Further information can be found starting on page 84.



ELECTRIC OPENING AID ECTURN. Once the door is unlocked, press gently on the door leaf and your entrance door will open and close automatically. Thanks to low-energy operation, there are no dangerous crushing or impact situations. No additional safety equipment is required. The opening aid is integrated elegantly into the door leaf and frame or available as a surface-mounted version.

→ Available for aluminium entrance doors ThermoSafe, ThermoSafe Hybrid, ThermoPlan Hybrid and ThermoCarbon



TOP LEFT. Finger-scan elegantly integrated into the door leaf

TOP CENTRE AND RIGHT. Convenient door opening with opening aid ECTurn


BOTTOM. Hörmann Smart Home control centre homee for all areas of your home

Tip


For easy door leaf locking, e.g. to carry objects through the door for example, we recommend an overhead door closer with mechanical hold-open device. For further information, see page 80.




76

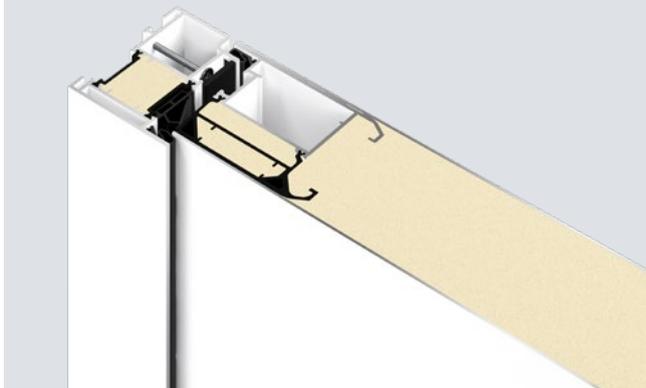

86

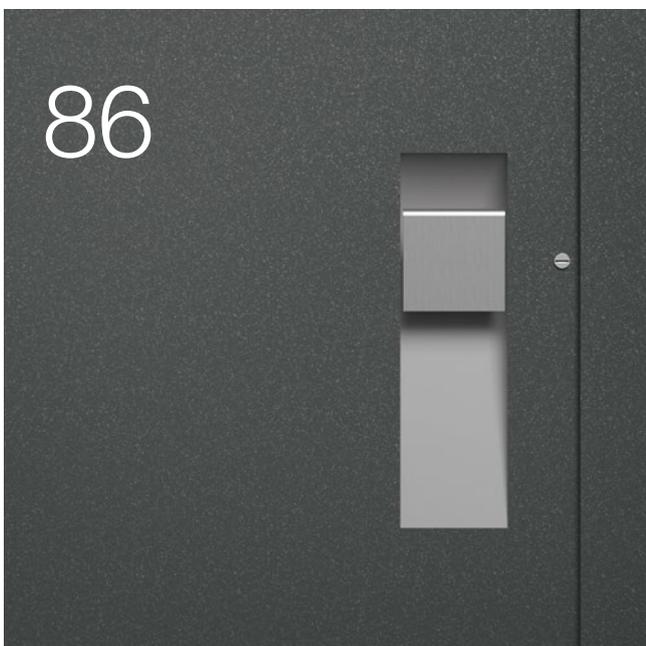

92

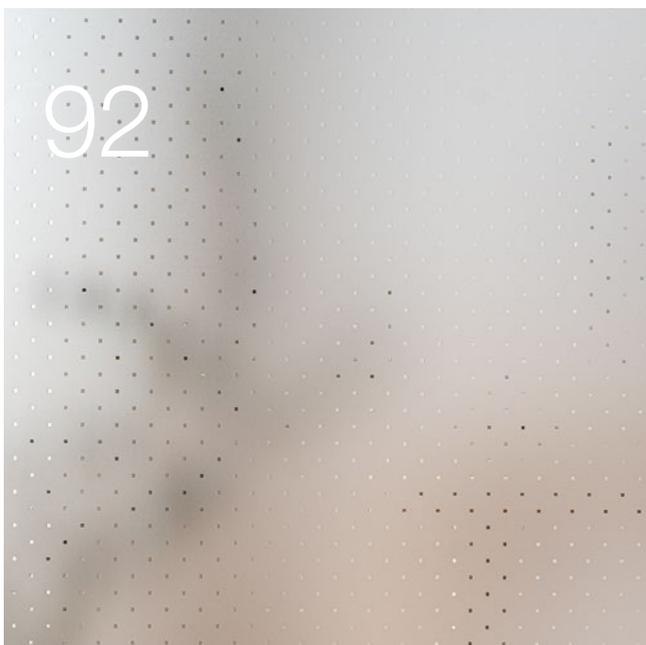


Design Equipment Accessories

- 76 Door leaf construction
- 78 Door versions
- 80 Door equipment
- 82 Security features
- 84 Comfort locks
- 86 Exterior handles
- 89 Lever handle sets
- 90 Colours
- 92 Glazing
- 94 Dimensions and technical manual

Door leaf construction

Completely foamed

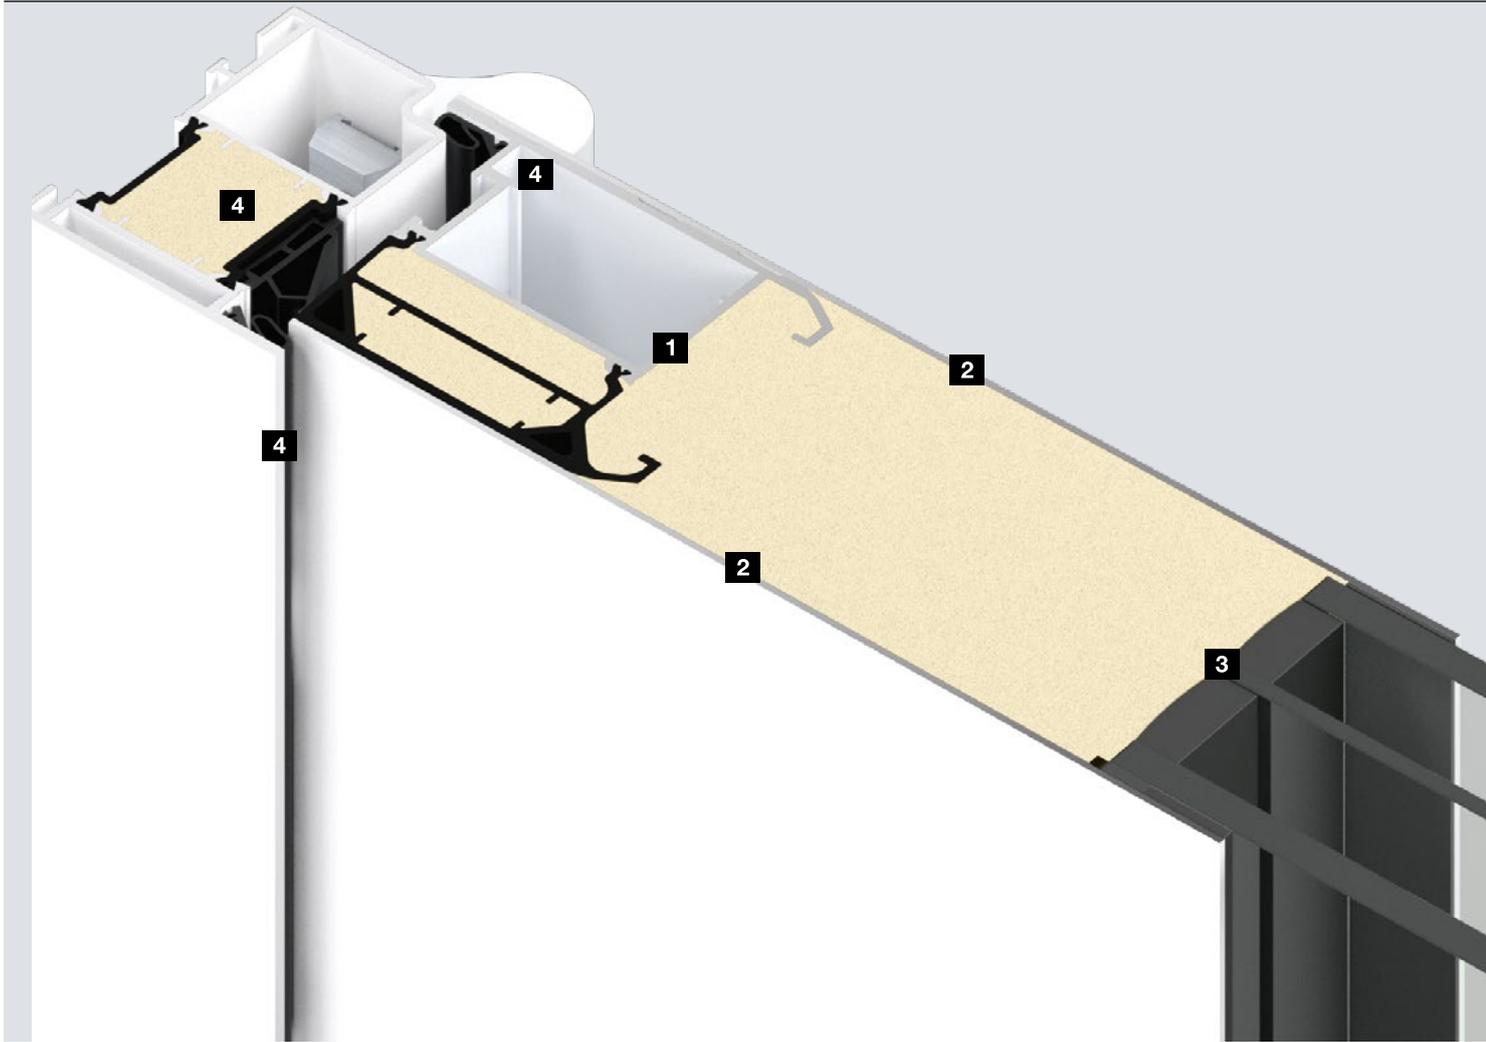

Performance characteristics

ThermoSafe

ThermoSafe Hybrid

Operating forces EN 12217	Up to class 5	Up to class 5
Long-term functionality / mechanical load EN 12400	Up to class 5	Up to class 5
Differential climate behaviour EN 12219	Up to 2d / 2e	Up to 2d / 2e
Air permeability EN 12207	Up to class 4	Up to class 4
Water tightness under heavy rain EN 12208	Up to class 7A	Up to class 7A
Resistance to wind load EN 12210	Up to class C2 / B2	Up to class C2 / B2
Impact resistance EN 13049	Up to class 1	Up to class 1
Mechanical strength EN 1192	Up to class 3	Up to class 3

Notice: The specified performance characteristics indicate the maximum possible performance of the entrance door. This performance may vary according to the equipment of the entrance door.



Completely foamed door leaf.

With ThermoSafe, ThermoSafe Hybrid, ThermoPlan Hybrid and ThermoCarbon entrance doors, the PU foam is optimally bonded to the door profile **1**, the internal and external sheets **2** and the glazing **3**. In contrast to other door systems, where the components are only glued together, this elegant construction is characterised by a particularly high dimensional stability and break-in resistance as well as even better thermal insulation, as no thermal bridges are created with glazings.


Multiple sealing system. **4**

Our high-quality seals seal off the leaf, even in case of extreme temperature differences. The interior seal goes all the way around the entire door leaf. The centre and outer door seals are inserted on 3 sides (top and side). All our seals are completely all-round and are not interrupted by the hinge system as with doors from other manufacturers. This sealing system is supplemented by the bottom edge seal, which effectively seals off the threshold. The centre seal impresses visually with its flocking and at the same time ensures that the leaf slides easily into the frame. This also ensures that the lock and cylinder always close smoothly.

ThermoPlan Hybrid	ThermoCarbon	TopComfort	NEW. TopComfort Portal
Up to class 5	Up to class 3	Up to class 3	Up to class 5
Up to class 5	Up to class 6	Up to class 5	Up to class 5
Up to 2d / 1e	Up to 2d / 2e	Up to 2d / 2e	Up to 2d / 1e
Up to class 4	Up to class 4	Up to class 4	Up to class 4
Up to class 7A	Up to class 7A	Up to class 5A	Up to class 7A
Up to class C2 / B2	Up to class C2 / B2	Up to class C2	Up to class C2 / B2
Up to class 1	Up to class 5	Up to class 1	Up to class 1
Up to class 3	Up to class 3	Up to class 3	Up to class 3

Door versions

The right profile for any requirement

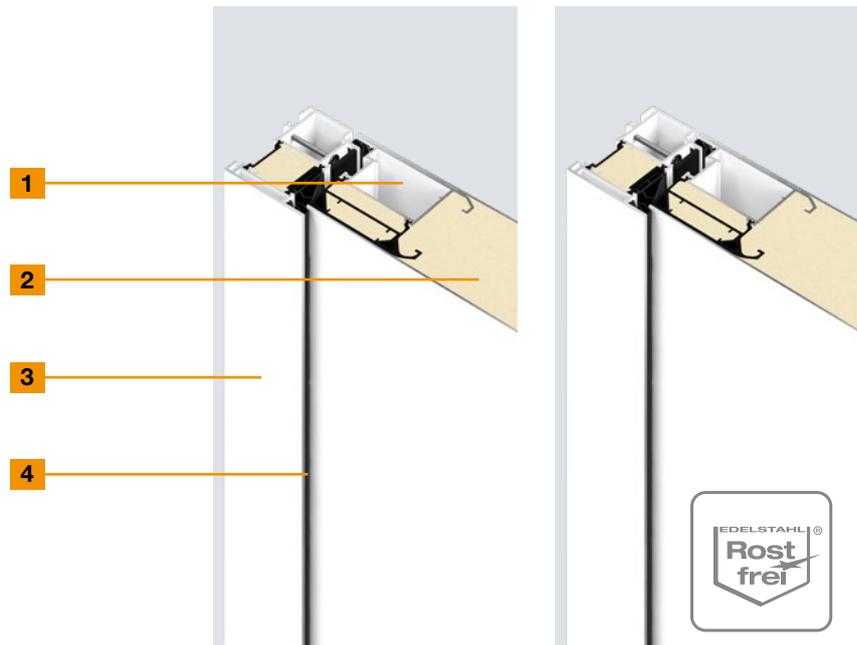


ThermoSafe

ThermoSafe Hybrid

	ThermoSafe	ThermoSafe Hybrid
1 Door profile	Interior	Interior
Material	Aluminium, with thermal break	Aluminium, with thermal break
2 Door leaf thickness	73 mm	73 mm
External sheet	Aluminium	Stainless steel
External rebate	Rebated	Rebated
Internal sheet	Aluminium	Aluminium
Internal rebate	Flush	Flush
3 Frame thickness	82 mm	82 mm
Material	Aluminium, with thermal break	Aluminium, with thermal break
4 Sealing system	triple	triple
Threshold	Polyamide	Polyamide
Thermal insulation (U _D -value)*	Up to 0.87 W/(m²·K)	Up to 0.87 W/(m²·K)
Acoustic insulation	30 dB	30 dB

* Dependent on door size. Specified values for RAM 1250 x 2200 mm

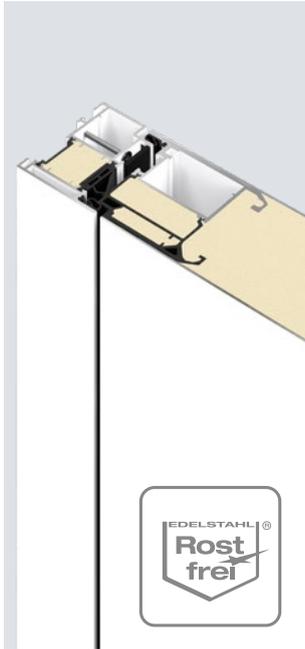

ThermoPlan Hybrid

ThermoCarbon

TopComfort

NEW. TopComfort Portal

Interior	Interior	Glazing frame	Interior
Aluminium, with thermal break	Carbon, with thermal break	Aluminium, with thermal break	Aluminium, with thermal break
82 mm	100 mm	83 mm	83 mm
Stainless steel	Aluminium		Aluminium
Flush	Rebated	Flush	Flush
Aluminium	Aluminium		Aluminium
Flush	Rebated	Flush	Flush
82 mm	111 mm	80 mm	83 mm
Aluminium, with thermal break	Aluminium, with thermal break	Aluminium, with thermal break	Aluminium, with thermal break
triple	quadruple	double	double
Polyamide	Polyamide	Aluminium / plastic	Aluminium / plastic
Up to 0.78 W/(m²·K)	Up to 0.47 W/(m²·K)	Up to 1.3 W/(m²·K)	Up to 1.2 W/(m²·K)
33 dB	29 dB	29 to 39 dB (depending on glass type)	29 dB

Only from Hörmann
 U₀-value of up to 0.47 W/(m²·K)

Door equipment

For an elegant, functional door design



	ThermoSafe	ThermoSafe Hybrid
1 Solid door view from the inside	●	●
2 3-way adjustable hinges, Traffic white RAL 9016	●	●
3 Concealed hinges	○	○
4 Electro duct with spiral cable	○	○
5 Electro duct with cable duct and fitting groove	-	-
Electro duct with cable duct and vertical / horizontal profile construction	○	○
6 Interior lever	Stainless steel lever handle CARO	Stainless steel lever handle CARO
7 Stainless steel lock plate	●	●
8 Insulated glass	Triple glazing	Triple glazing
9 Integrated overhead door closer or overhead door closer HDC 35 (not shown) with mechanical hold-open device	○	○
Opening limiter	○	○
10 Retractable bottom seal with weather protection	○	○

● = As standard ○ = Optional - = Not available
 * Style 310 with triple glazing



4



6



9



5



7



10

ThermoPlan Hybrid

ThermoCarbon

TopComfort

NEW. TopComfort Portal

●	●	●	●
●	-	●	●
○	●	○	○
○	-	○	○
-	○	-	○
○	-	-	-
Stainless steel lever handle CARO	Stainless steel lever handle CARO	Aluminium lever handle Rondo, Traffic white RAL 9016	Aluminium lever handle Rondo, Traffic white RAL 9016
●	● (Integrated in rebate)	●	●
Triple glazing	Quadruple-pane glazing*	Triple glazing	Triple glazing
○	○	-	○
○	-	○ With scissors limiter	○
-	-	○ Without weather protection	-

Security features

Certified security features as standard



	ThermoSafe	ThermoSafe Hybrid
1 Profile cylinder with flush-fitting security rose escutcheon	-	-
2 Profile cylinder with surface-mounted security rose escutcheon	●	●
3 Security lock with swing bolt and mechanical locking	● H5 with 5-point locking	● H5 with 5-point locking
Electric strike with day / night function	○	○
Electric strike with day / night function and permanently open function	○	○
4 Security lock with bolt and mechanical self-locking	■ S5 Automatic with 5-point locking	■ S5 Automatic with 5-point locking
4 Security lock with bolt, arrestor hook and mechanical self-locking	○ S5S Automatic with 5-point locking	○ S5S Automatic with 5-point locking
Leverage protection* on the hinge side	●	●
RC2 security features	-	-
RC3 security features	●	●
RC4 security features	-	● For door styles without glazing and with H5 lock

● = As standard ■ = Optional at no surcharge ○ = Optional - = Not available

* Not required with concealed hinges



RC2 security
Tested and certified

The opportunist burglar attempts to break open the locked door with simple tools within 3 minutes.



RC3 security
Tested and certified

The burglar attempts to break open the locked door with simple tools, e.g. a crowbar, as well as simple drilling tools within 5 minutes.



RC4 security
Tested and certified

The experienced burglar attempts to break open the locked door with simple tools, e.g. a crowbar, as well as drilling and striking tools within 10 minutes.



ThermoPlan Hybrid

ThermoCarbon

TopComfort

NEW. TopComfort Portal

●	●	●	●
-	-	-	-
● H5 with 5-point locking	● H9 with 9-point locking	● H5 with 5-point locking	● H5 with 5-point locking
○	○	○	○
○	○	○	○
■ S5 Automatic with 5-point locking	■ S7 Automatic with 7-point locking	■ S5 Automatic with 5-point locking	■ S5 Automatic with 5-point locking
○ S5S Automatic with 5-point locking	-	○ S5S Automatic with 5-point locking	○ S5S Automatic with 5-point locking
●	Not required	●	●
		○	
●	●	○	
-	○	-	-

Comfort locks

Smart security

Automatic security lock S5 / S7 with electric motor

The lock is equipped with an electric motor with automatic self-locking (VdS class B) that unlocks the bolt of your entrance door with an electric impulse. Depending on the lock version, you can either open your entrance door from inside via a button on an existing house intercom or from outside via code, fingerprint, radio or Bluetooth.

	S5 / S7 Comfort	S5 / S7 Code	S5 / S7 Scan	S5 / S7 Smart	S5 / S7 BlueSecur
Connection to house intercom	●	●	●	●	●
Code switch in the door leaf		●			
Code switch in the lever handle		○			
Finger-scan in the door leaf			●		
Finger-scan in the lever handle			○		
BiSecur radio		○	○	●	
Bluetooth receiver for Hörmann BlueSecur		○	○		●


● = As standard ○ = Optional

S5 = 5-point locking for ThermoSafe, ThermoSafe Hybrid, ThermoPlan Hybrid

S7 = 7-point locking for ThermoCarbon



BiSecur



All automatic locks with electric motor can optionally be equipped with the BiSecur radio system, allowing you to conveniently open your entrance door with an optional hand transmitter or radio switch.

Another advantage is that you can use the same hand transmitter to operate your Hörmann garage door or entrance gate.

The extremely secure radio system ensures that no unauthorised person can copy your radio signal. All operators, receivers and control elements with the BiSecur radio system are 100% compatible with each other.



DOOR AND GATE OPERATORS AND
SMART HOME CONTROL CENTRES
www.hoermann.com



Further information can be found in the "Door operators and Smart Home systems" brochure.




Code switch

Fitting in lever handle HOE 605 or on the door leaf, for up to 20 codes, dimensions: 45 x 75 mm



Finger-scan

Fitting in lever handle HOE 506 / HOE 606 (see figure left) or on the door leaf, for up to 150 fingerprints, simple management of fingerprints by app, VdS-approved, dimensions: 45 x 75 mm

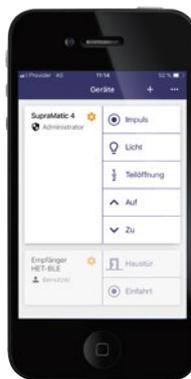

Bluetooth receiver

For operation by smartphone using the Hörmann BlueSecur app

 **Hörmann BlueSecur**

Only from Hörmann
European patent

Conveniently open and close your door via Bluetooth using your smartphone. Lock and unlock your entrance door using the user-friendly Hörmann BlueSecur app. In addition, other user permissions can be permanently or temporarily transferred to other smartphones, so that every family member always has their “entrance door opener” with them.

Exterior handles

Tangibly beautiful design



HOE 500

Brushed matt stainless steel
Handle length ¹⁾: 1000 mm

HOE 501 / HOE 739

Brushed stainless steel
Handle length ¹⁾: 1000 mm (HOE 501), 1703 mm (HOE 739)

HOE 501 / HOE 739 black.edition

Jet black RAL 9005 matt fine structure
Handle length ¹⁾: 1000 mm (HOE 501), 1703 mm (HOE 739)

HOE 506

Brushed stainless steel, prepared for a finger-scan
Handle length ¹⁾: 1000 mm

HOE 506 black.edition

Jet black RAL 9005 matt fine structure, prepared for a finger-scan
Handle length ¹⁾: 1000 mm

HOE 600 / 610 / 615

Brushed stainless steel
Handle lengths ¹⁾: 950 mm (HOE 600), 1100 mm (HOE 615), 1250 mm (HOE 610)



HOE 730

Brushed stainless steel
Handle length ⁶⁾: 1876 mm

HOE 795 / 796

Brushed stainless steel
Handle lengths ²⁾: 1027 mm (HOE 795), 627 mm (HOE 796)

38-1

Polished stainless steel with decorative centre part
Handle length ¹⁾: 1000 mm

38-2

Brushed stainless steel
Handle length ¹⁾: 1000 mm

HOE 800

Polished stainless steel with decorative centre part
Handle length ³⁾: 330 mm

14-1

Polished stainless steel with decorative centre part
Handle length ³⁾: 330 mm



HOE 605

Brushed stainless steel, prepared for a code switch
Handle length ¹⁾: 1000 mm

HOE 700

Polished stainless steel with decorative centre part
Handle length ¹⁾: 1000 mm

HOE 701

Stainless steel with decorative centre part
Handle length ¹⁾: 1000 mm

HOE 706

Brushed stainless steel, prepared for a finger-scan
Handle length ¹⁾: 1000 mm

HOE 710

Brushed stainless steel
Handle length: adjusted to door height

HOE 740

Brushed stainless steel
Handle length ²⁾: adjusted to door height



14-2

Brushed stainless steel
Handle length ³⁾: 330 mm

14-4

Polished brass
Handle length ³⁾: 330 mm

81-1

Polished brass
Handle length ³⁾: 290 mm

92-2

Brushed stainless steel
Handle length ⁴⁾: 350 mm

94-2

Brushed stainless steel
Handle length ⁵⁾: 300 mm

Spacing of fixings:

¹⁾ 1594 mm or 600 mm

²⁾ 980 mm or 580 mm

³⁾ 210 mm

⁴⁾ 350 mm

⁵⁾ 300 mm

⁶⁾ 1770 mm

Exterior handles

Design handles, adjusted to the door height

Design handle G 750



Handle bar in E6 / EV1, end cap in stainless steel



Handle bar in Traffic white RAL 9016 matt, end cap in stainless steel



Handle bar black.edition in Jet black RAL 9005 matt fine structure, end cap in Jet black RAL 9005 matt fine structure

Design handle G 760



Handle bar in anodised aluminium E6 / EV 1, handle application in Hörmann colour CH 703-AM Anthracite Metallic, end cap in stainless steel



Handle bar in Hörmann colour CH 703-AM Anthracite Metallic matt fine structure, handle application in Hörmann colour CH 703-AM Anthracite Metallic matt fine structure, end cap in stainless steel



Handle bar black.edition in Jet black RAL 9005 matt fine structure, handle application in Jet black RAL 9005 matt fine structure, end cap in Jet black RAL 9005 matt fine structure



Handle bar in anodised aluminium E6 / EV 1, handle application in anodised aluminium E6 / EV 1, end cap in stainless steel



Handle bar in anodised aluminium E6 / EV 1, handle application in Traffic white RAL 9016 matt, end cap in stainless steel




Handle bar in anodised aluminium E6 / EV 1, handle application in Jet black RAL 9005 matt fine structure, end cap in stainless steel



Handle bar in anodised aluminium E6 / EV 1, handle application in Decoral Rusty Patina, end cap in stainless steel

Handle application in Decoral

Maximum handle length 2100 mm



- 1 Cement
- 2 Rusty Patina
- 3 Wild Oak
- 4 Barnwood
- 5 Barnwood grey

Lever handle sets

Excellent design and security



Stainless steel lever handle CARO

As standard for ThermoCarbon, ThermoSafe, ThermoSafe Hybrid and ThermoPlan Hybrid as well as optionally for TopComfort and TopComfort Portal



Stainless steel lever handle Okto

Optionally for ThermoSafe, ThermoSafe Hybrid, ThermoPlan Hybrid, TopComfort and TopComfort Portal



Aluminium lever handle Rondo

In Traffic white RAL 9016, as standard for TopComfort and TopComfort Portal



Stainless steel lever handle set D-116

Optionally for ThermoSafe, ThermoSafe Hybrid, ThermoPlan Hybrid, TopComfort and TopComfort Portal



Stainless steel lever handle set D-335

Optionally for ThermoSafe, ThermoSafe Hybrid, ThermoPlan Hybrid, TopComfort and TopComfort Portal



Aluminium lever handle D-360

black.edition in Jet black, RAL 9005 matt fine structure, optionally for ThermoSafe, ThermoSafe Hybrid, ThermoPlan Hybrid and ThermoCarbon



Aluminium lever handle D-360

In Traffic white, RAL 9016, optionally for ThermoSafe, ThermoSafe Hybrid, ThermoPlan Hybrid and ThermoCarbon



Stainless steel lever handle D-360

Optionally for ThermoSafe, ThermoSafe Hybrid, ThermoPlan Hybrid and ThermoCarbon



Stainless steel lever handle D-360

Optionally for ThermoSafe, ThermoSafe Hybrid, ThermoPlan Hybrid and ThermoCarbon



Aluminium security handle set 62-1

Optionally for ThermoSafe, ThermoSafe Hybrid, ThermoPlan Hybrid, TopComfort (not for RC3 security features) and TopComfort Portal



Stainless steel security handle set 62-4

In Traffic white RAL 9016, optionally for ThermoSafe, ThermoSafe Hybrid, ThermoPlan Hybrid, TopComfort (not for RC3 security features) and TopComfort Portal



Protective lever handle

Prevent unintentional door opening by pets: Our protective lever handle opens only after approx. 87° instead of 25° as with conventional lever handles. This means that door locking is not required. Of course, our comfort functions such as the electric strike, code switch or finger-scan stay the same.

→ Available for all aluminium entrance doors










Watch the video on YouTube or www.hormann.co.uk/media-centre

MatchColor, standard and preferred colours

For individual designs



MatchColor
















MatchColor

MatchColor

Design your home in perfect colour harmony – with the MatchColor preferred colours for sectional garage doors, entrance doors, side doors and steel doors with a matching appearance. Enjoy the harmonious overall appearance thanks to matching colours. That is Hörmann brand quality!

Standard and preferred colours



MatchColor

- 1** CH 703-AM Anthracite Metallic, matt fine structure
- 2** RAL 9005 Jet black, matt fine structure
- 3** RAL 8028 Terra brown, matt
- 4** RAL 7040 Window grey, matt
- 5** RAL 7039 Quartz grey, matt
- 6** RAL 7035 Light grey, matt
- 7** RAL 7030 Stone grey, matt
- 8** RAL 7016 Anthracite grey, matt
- 9** RAL 7015 Slate grey, matt
- 10** RAL 7012 Basalt grey, matt

Standard colour

- 11** RAL 9016 Traffic white matt

Preferred colours

- 12** RAL 9016 Traffic white, glossy
- 13** RAL 9007 Grey aluminium, matt fine structure
- 14** RAL 9006 White aluminium, silk-gloss
- 15** RAL 9001 Cream, matt fine structure
- 16** RAL 7039 Quartz grey, matt fine structure
- 17** RAL 7030 Stone grey, matt fine structure
- 18** RAL 7022 Umbra grey, matt
- 19** RAL 7016 Anthracite grey, matt fine structure
- 20** RAL 7015 Slate grey, matt fine structure
- 21** RAL 6009 Fir green, matt
- 22** RAL 6005 Moss green, matt
- 23** RAL 3003 Ruby red, matt
- 24** CH 607 Chestnut, matt fine structure

Please note:

All colours based on RAL. The colours and surface finishes shown are subject to the limitations of the printing process and cannot be regarded as binding.






Please consult with your local Hörmann sales partner.

Choice of RAL colours

All entrance doors are optionally available in around 200 RAL Classic colours (with the exception of pearl-effect and fluorescent colours) as well as in many NCS and dB colours.

Glazing

For door styles and side elements





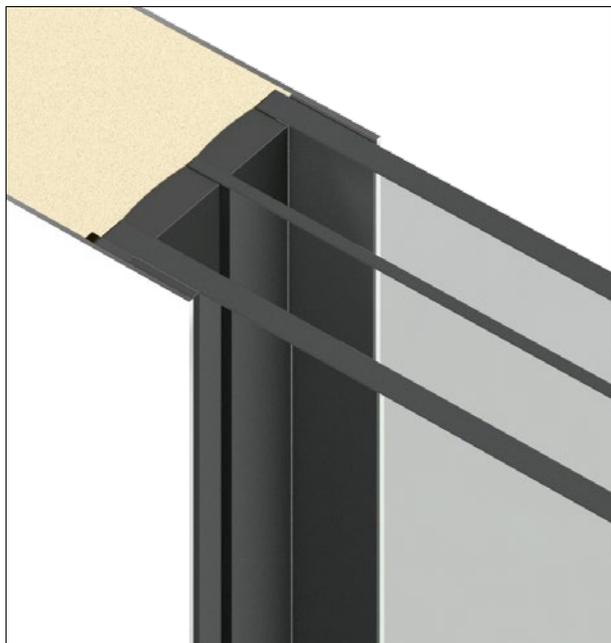


Only from Hörmann

10 mm P5A laminated safety glass and 8 mm laminated safety glass as standard

Safe glazing.

When it comes to industrial safety and burglar protection, Hörmann aluminium entrance doors fulfil the absolute highest demands. The laminated safety glass on the interior and exterior of the triple-pane insulated glazing provides maximum security. In case of glass breakage, the glass splinters are also bound on the inside, virtually eliminating any danger of being injured by the shards. Furthermore, the laminated safety glass offers better burglar protection as it makes reaching through more difficult.



- 1 Float, clear / clear glass
- 2 Float, matt / sand-blasted
- 3 Satinato
- 4 Pave white
- 5 Parsol grey
- 6 Parsol grey, matt
- 7 Ornament 504
- 8 Ornament 553
- 9 Chinchilla
- 10 Micrograin (Madras basic)
- 11 Reflo, clear
- 12 Reflo, matt
- 13 Silk
- 14 Master-Carré
- 15 Baroque white
- 16 Niagara white
- 17 Gothic white
- 18 Uadi white
- 19 **NEW.** Black glass

Dimensions and technical manual

ThermoSafe / ThermoSafe Hybrid

ThermoSafe / ThermoSafe Hybrid entrance door sizes

70 mm frame version	Overall frame dimension ¹⁾ (ordering size)	Structural opening ¹⁾	Clear frame dimension
Standard	Max. 1250 × 2250	Max. 1270 × 2260	Max. 1110 × 2180
Oversize	Max. 1250 × 2350	Max. 1270 × 2360	Max. 1110 × 2280
XXL	Max. 1250 × 2500	Max. 1270 × 2510	Max. 1110 × 2430


ThermoSafe / ThermoSafe Hybrid side element sizes

Vertical profile construction	Side element height ¹⁾	TM side element width ¹⁾	TM entrance door width ¹⁾
1-sided	Max. 3000	260 – 1600	Max. 1230
2-sided	Max. 3000	260 – 1600	Max. 1210


The maximum transport size of a door assembly (incl. side elements, transom lights and surface-mounted profiles) must not exceed 2700 mm on any side.

Coupling construction	Side element height ¹⁾	TM side element width ¹⁾	TM entrance door width ¹⁾
1-/2-sided	Max. 3000	300 – 2500 ²⁾	1250


¹⁾ For 110 mm frames + 40 mm
²⁾ With Reflo or Micrograin glazing

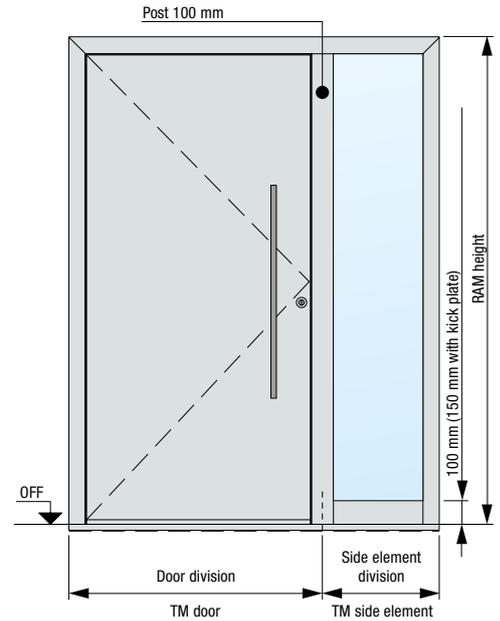


Horizontal view of door

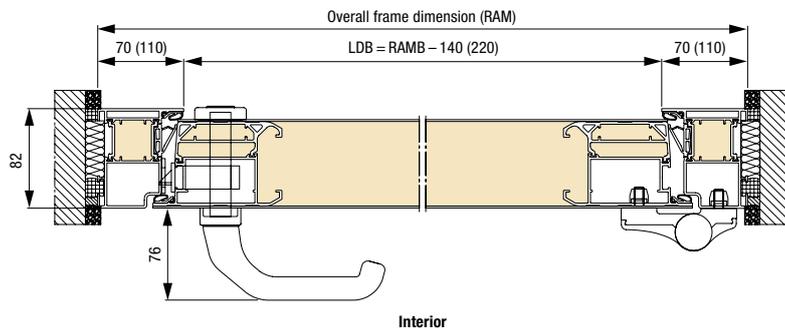

Vertical view of door

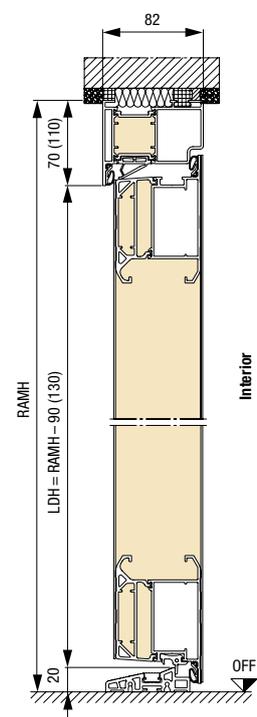

Bottom spacer profile / transport protection

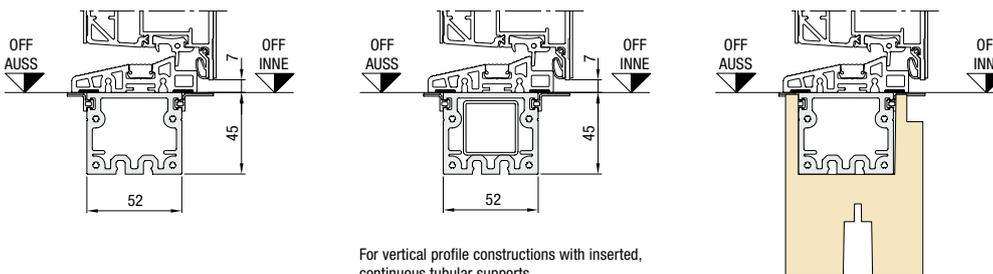

For vertical profile constructions with inserted, continuous tubular supports

NEW. Thermo floor recess for higher thermal insulation in the floor area

ThermoPlan Hybrid entrance door sizes

70 mm frame version	Overall frame dimension ¹⁾ (ordering size)	Structural opening ¹⁾	Clear frame dimension
Standard	Max. 1250 × 2250	Max. 1270 × 2260	Max. 1110 × 2180
Oversize	Max. 1250 × 2350	Max. 1270 × 2360	Max. 1110 × 2280
XXL	Max. 1250 × 2500	Max. 1270 × 2510	Max. 1110 × 2430


ThermoPlan Hybrid side element sizes

Vertical profile construction	Side element height ¹⁾	TM side element width ¹⁾	TM entrance door width ¹⁾
1-sided	Max. 3000	260 – 1600	Max. 1230
2-sided	Max. 3000	260 – 1600	Max. 1210


The maximum transport size of a door assembly (incl. side elements, transom lights and surface-mounted profiles) must not exceed 2700 mm on any side.

Coupling construction	Side element height ¹⁾	TM side element width ¹⁾	TM entrance door width ¹⁾
1-/2-sided	Max. 3000	300 – 2500 ²⁾	1250


¹⁾ For 110 mm frames + 40 mm
²⁾ With Reflo or Micrograin glazing

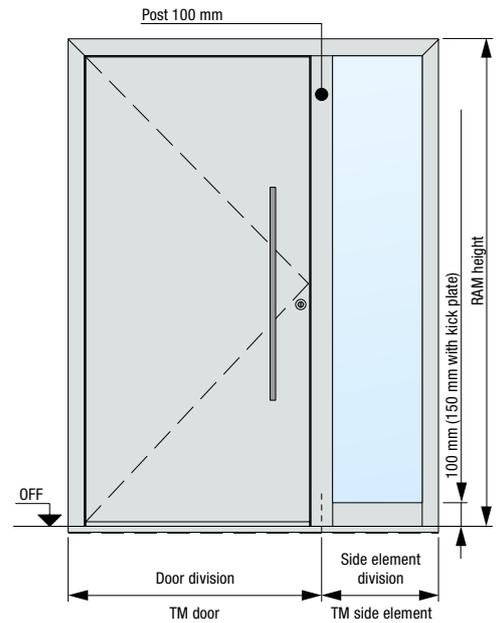


Horizontal view of door

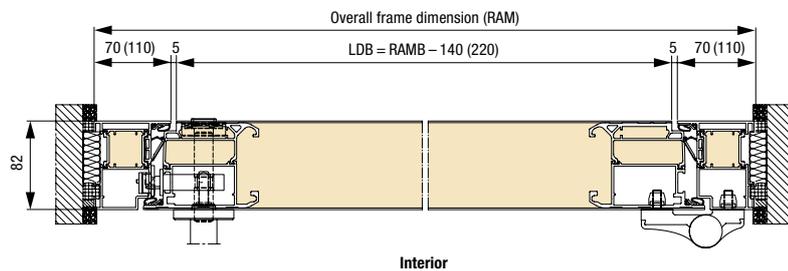

Vertical view of door

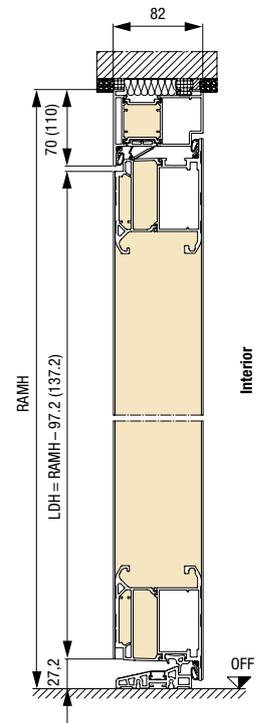

Bottom spacer profile / transport protection

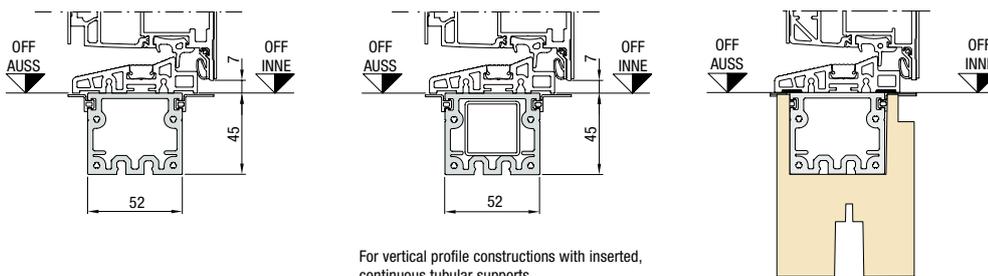

For vertical profile constructions with inserted, continuous tubular supports

NEW. Thermo floor recess for higher thermal insulation in the floor area

Dimensions and technical manual

ThermoCarbon

ThermoCarbon entrance door dimensions


Version	Overall frame dimension (ordering size)	Structural opening	Clear frame dimension
Standard	Max. 1340 × 2350	Max. 1360 × 2360	Max. 1140 × 2230
XXL	Max. 1340 × 3000	Max. 1360 × 3010	Max. 1140 × 2880

ThermoCarbon side element dimensions


Vertical profile construction	Side element height	TM side element width	TM entrance door width
1-sided	Max. 3000	300 – 1600	Max. 1300
2-sided	Max. 3000	300 – 1600	Max. 1260

The maximum transport size of a door assembly (incl. side elements, transom lights and surface-mounted profiles) must not exceed 2700 mm on any side.


Coupling construction	Side element height	TM side element width	TM entrance door width
1-/2-sided	Max. 3000	340 – 1600	1340

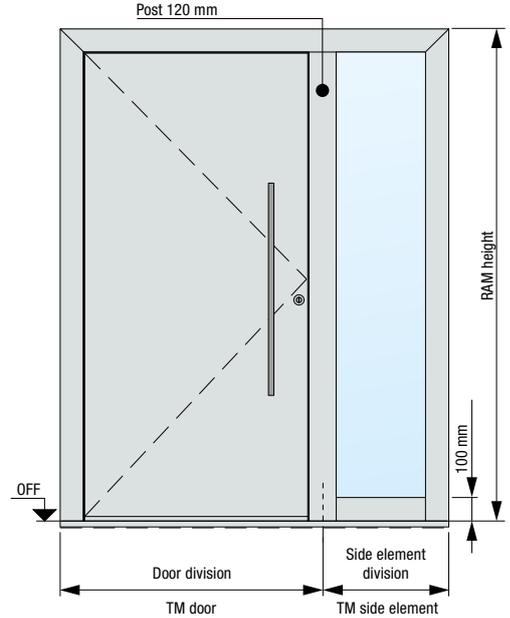


Horizontal view of door

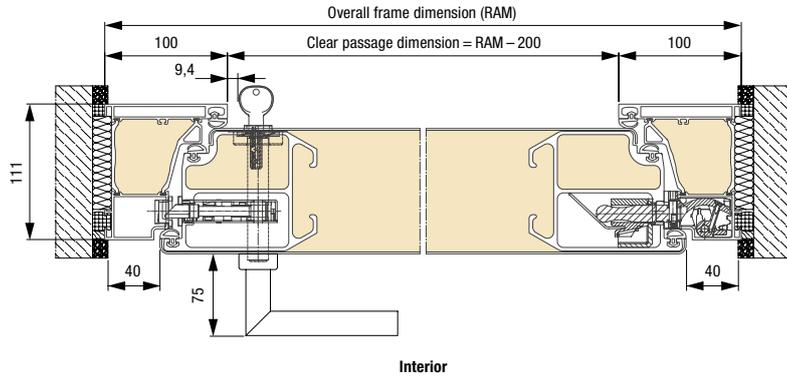

Vertical view of door

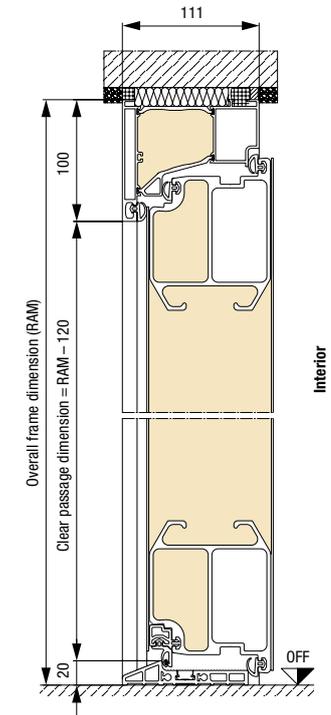

Bottom spacer profile / transport protection

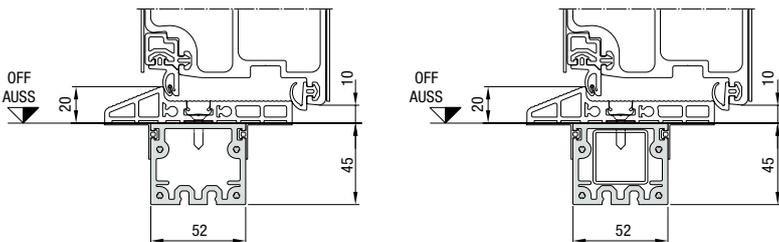

For vertical profile constructions with inserted, continuous tubular supports

Dimensions in mm

TopComfort entrance door sizes

70 mm frame version	Overall frame dimension ¹ (ordering size)	Structural opening ¹	Clear frame dimension
Standard	Max. 1300 × 2500	Max. 1270 × 2510	Max. 1160 × 2430


TopComfort side element sizes

Vertical profile construction	Side element height ¹⁾	TM side element width ¹⁾	TM entrance door width ¹⁾
1-sided	Max. 3000	260 – 1600	Max. 1230
2-sided	Max. 3000	260 – 1600	Max. 1210


The maximum transport size of a door assembly (incl. side elements, transom lights and surface-mounted profiles) must not exceed 2700 mm on any side.

Coupling construction	Side element height ¹⁾	TM side element width ¹⁾	TM entrance door width ¹⁾
1-/2-sided	Max. 3000	300 – 1600	1250


¹⁾ For 110 mm frames + 40 mm

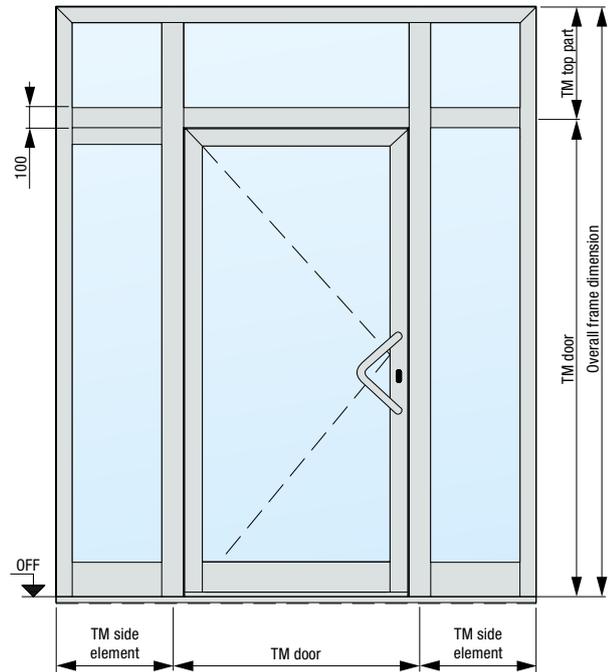


Horizontal view of door

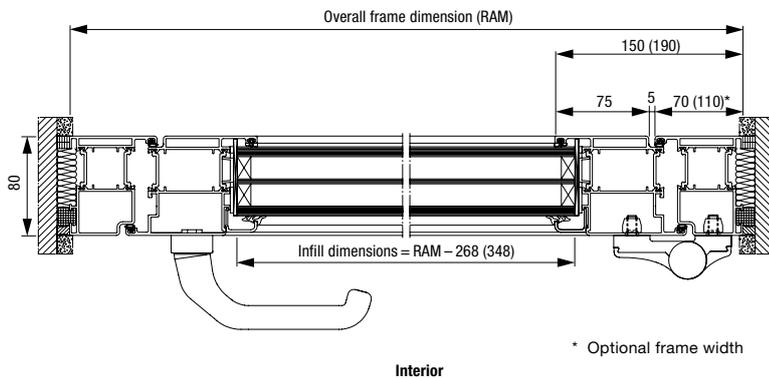

Vertical view of door

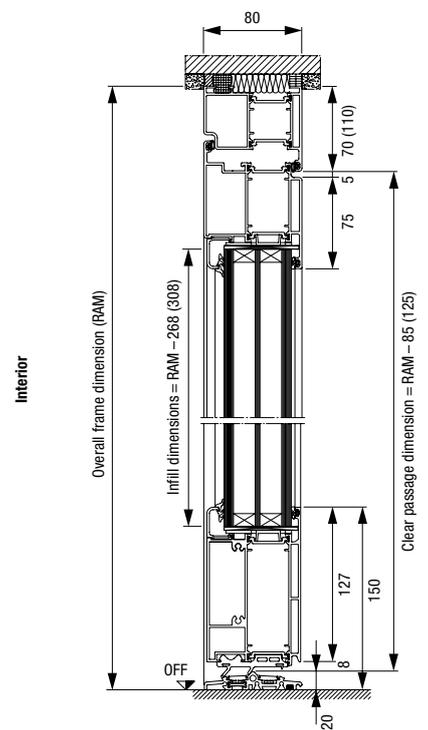

Bottom spacer profile / transport protection

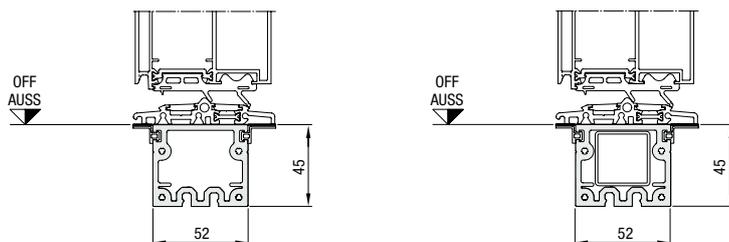


For vertical profile constructions with inserted, continuous tubular supports

Dimensions and technical manual


NEW. TopComfort Portal

TopComfort Portal entrance door sizes


Version	Overall frame dimension (ordering size)	Structural opening	Clear frame dimension
Standard	Max. 2600 × 2500	Max. 2620 × 2510	Max. 2400 × 2400

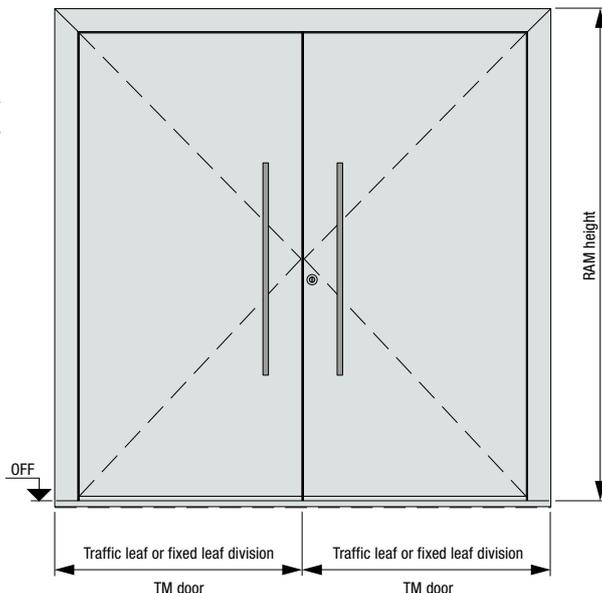


Horizontal view of door

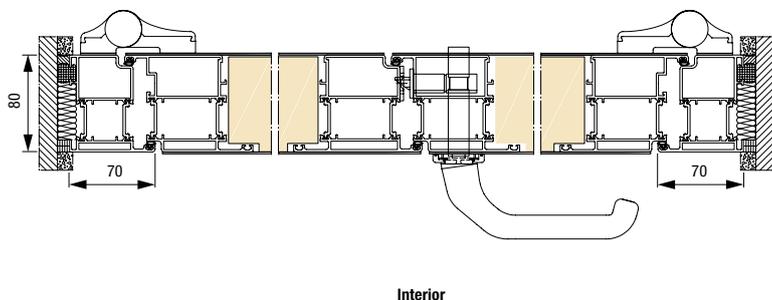

Vertical view of door

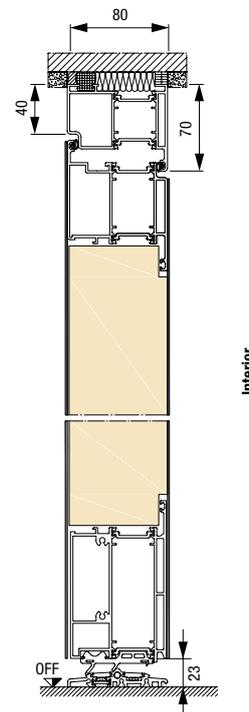

Bottom spacer profile / transport protection

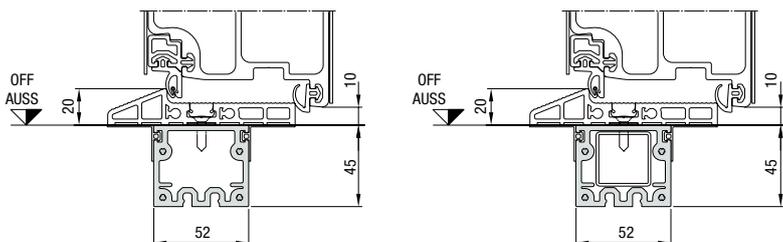

For vertical profile constructions with inserted, continuous tubular supports

Dimensions in mm



Experience Hörmann quality in new construction and modernisation

Hörmann products have impressive durability and high functionality. You can easily plan for new construction as well as modernisation. The carefully coordinated solutions make your home more beautiful, more secure and more comfortable.

GARAGE DOORS. GATE AND DOOR OPERATORS. ENTRANCE DOORS. RESIDENTIAL INTERNAL DOORS. STEEL DOORS. FRAMES. STORAGE SPACE SYSTEMS.



Some of the products shown are equipped with special equipment and do not always correspond to the standard versions. The surface finishes and colours shown are subject to the limitations of the printing process and cannot be regarded as binding. All rights reserved. No part may be reproduced without our prior permission. Subject to changes.