



SOLID RUBBER HIGH-SPEED DOORS

High-performance external doors for demanding applications in harsh ambient conditions

HÖRMANN

Good reasons to choose solid rubber high-speed doors

A quality product of the Hörmann Group

TNR Industrial Doors – the experts for solid rubber high-speed doors


TNR Industrial Doors offers highly specialised industrial door solutions. Due to the high innovative strength in development, combined with decades of experience of our dedicated team, TNR has earned itself an excellent reputation in the industry. As a result, the solid rubber high-speed doors, which are renowned for their robustness and durability, have proven their worth in difficult applications as well as in demanding environments worldwide.

Robust solution for external use

With its customised door solutions, TNR can react to varying requirements and also ensure reliable door operation and a long service life of the door in harsh ambient conditions including high wind loads and large temperature differences.

Advantages that are worthwhile

The solid rubber high-speed doors are low maintenance, easy to fit and are ready for operation again quickly in the event of an impact, e.g. collision damage, thanks to the screw-connected Curtain Lok fasteners and an aluminium bottom profile, using only very few tools and a couple of simple steps.

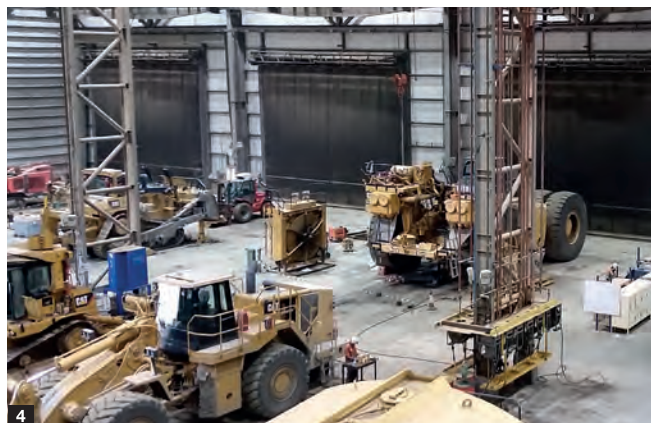

TNR Industrial Doors Barrie, Canada **1**


Mine operation West Africa (Sahara) **2**

Durable and robust **3**

Ideal for demanding environments,
e.g. gold mines in West Africa **4**

Equipment features

Size range

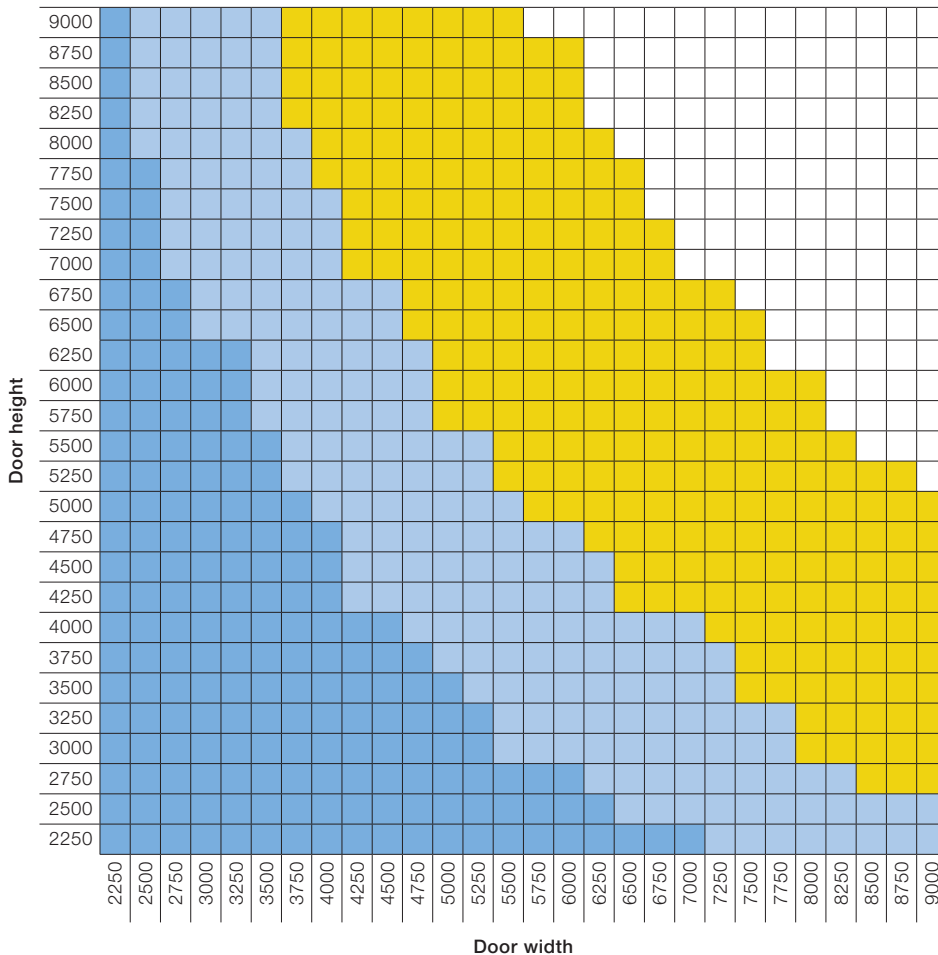

Safety grille
as standard



Frequency converter control
as standard



Door type	Solid rubber high-speed doors
Suitable application	Exterior
Resistance to wind load (DIN 13241-1)	Class 5
Curtain	Robust SBR* 6 mm curtain with reinforced polyester woven inlay
Temperature range	-40°C to +80°C

Door speed m/s	Blue	Light Blue	Yellow
Opening	1,22	0,61	0,31
Closing	0,76	0,61	0,31
Operator (kW)	2,42	2,42	2,42

* Styrene butadiene rubber with reinforced polyester woven inlay

Optional extras

- Vision field 405 × 405 mm
- Crash protection
- Induction loop
- 3D laser scanner Scanprotect
- Movement detector
- SmartControl – web-based solution for remote analysis of industrial doors

Curtain colours



RAL 9005 Black
(standard)




RAL 7037 Grey
(subject to surcharge)



RAL 5017 Blue
(subject to surcharge)



RAL 2008 Orange
(subject to surcharge)

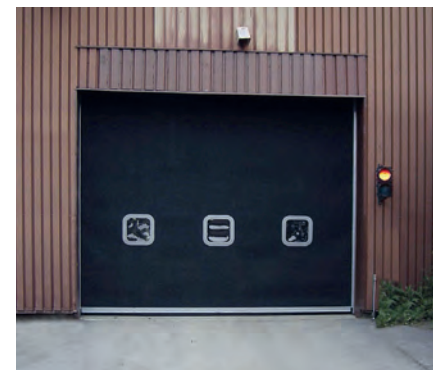

Solid rubber high-speed door with vision field

Everything from a single source for construction and industry

Our large product range offers the right solution for any requirement. All products are optimally adjusted to work together, ensuring high functional safety. This makes us a strong, future-oriented partner for industrial and public construction projects.

**INDUSTRIAL DOORS. LOADING TECHNOLOGY. SLIDING DOORS.
CONSTRUCTION PROJECT DOORS. PERIMETER PROTECTION SYSTEMS.**



Some of the products shown are equipped with special equipment and do not always correspond to the standard versions. The surface finishes and colours shown are subject to the limitations of the printing process and cannot be regarded as binding. All rights reserved. No part may be reproduced without our prior permission. Subject to changes.